

	Mast Arm Pole (Length) Combination Pole (Traffic Signal and Street Light) Pedestal Pole Pedestrian Pushbutton Pole Traffic Signal Head Traffic Signal Head w/Backplate Pedestrian Signal Indication EVP Detector Advance Radar Detector Presence Radar Detector Type 1 Service Box Type 2 Service Box Type 1 Fiber Optic Service Box Type 2 Fiber Optic Service Box Type 1 Junction Box Type 2 Junction Box ATC Traffic Signal Controller Cabinet (Single Wide) ATC Traffic Signal Controller Cabinet (Double Wide) Advance Loop Detector, OPTCS Loop Presence Loop Detector Presence Detection Zone Radar Detector Reference Aim Point (Abstract Only) Video Detection Camera Closed Circuit TV (CCTV) Camera CNG Generator Cabinet (Shaded Portion Shows Exhaust Side of Cabinet) Gas Meter
	HDPE Fiber Optic Conduit with Locating Cable (Sized as Noted) PVC Conduit (Size as Noted) 1" HDPE Conduit 1.5" HDPE Conduit 2" HDPE Conduit 3" HDPE Conduit 4" HDPE Conduit Electrical Service Every Service Pedestal Class E LED Post-Top Luminaire w/14' Pole 150W Post-Top Luminaire w/14' Pole Class D LED Cobra-Head w/30' Light Pole Class C LED Cobra-Head w/30' Light Pole Class B LED Cobra-Head w/30' Light Pole Class A LED Cobra-Head w/30' Light Pole Class D LED Cobra-Head w/40' Light Pole Class C LED Cobra-Head w/40' Light Pole Class B LED Cobra-Head w/40' Light Pole Class A LED Cobra-Head w/40' Light Pole Class D LED Cobra-Head w/Combination Pole Class C LED Cobra-Head w/Combination Pole Class B LED Cobra-Head w/Combination Pole Class A LED Cobra-Head w/Combination Pole Construction Note Pole Number Service Box Number Vehicular Signal Head No. Pedestrian Signal Head No. Loop Detector No. (Video or Radar Detection Zone No.) Flat Sheet Street Name Sign Flat Sheet Traffic Sign Illuminated Street Name Sign

1. The contractor shall stake the locations for all poles, controllers, service boxes and junction boxes to be installed. The stations and offsets provided are to the center of the traffic signal equipment. Elevations shall be provided. If obstructions are encountered during installation, the contractor will re-stake those locations affected by the obstruction. The Traffic Signal Inspector shall inspect the staking prior to any excavation/construction.
2. The locations of existing underground utilities, if shown, are shown in an approximate location only and have not been independently verified. The contractor shall be responsible for contacting all utility companies for locations of all underground lines prior to excavation and be fully responsible for any and all damages, which might be occasioned by the contractor's failure to exactly locate and preserve any and all underground utilities.
3. The City of Overland Park is on the KS OneCall System. The contractor shall call 811 to obtain locates for streetlighting, traffic signal, and fiber optic conduits/cables. Irrigation systems are not considered an underground utility and identification is not required by the owner.
4. The contractor shall be responsible for removing and salvaging existing equipment as noted. See instructions for Disassembly and Salvage of Traffic Signal Equipment.
5. Rock and shale may be encountered and thus the bid items shall reflect the extra work necessary to accomplish the installation. No additional payments ("extras") will be made for excavation of rock or shale and unsuitable backfill materials. The following conditions shall prevail: All conduit trenches and pre-drilled holes within rock/shale shall be backfilled with suitable material and properly compacted in accordance with the specifications.
6. Conduits shall be installed under all streets, drives and sidewalks prior to paving within the limits of the street improvements. The conduit placement shall be coordinated with the paving operation, if applicable, and inspected by the City Traffic Signal Inspector. (See Trench Details)
7. The conduit shall be installed under any existing underdrain pipe crossings and underdrain blankets. Where pole foundations are to be installed through an existing underdrain blanket, the blanket shall be pre-cut to prevent damage of the blanket. In the event the blanket is damaged, the fabric shall be replaced.
8. HDPE conduit shall be installed continuously between all traffic signal appurtenances. Conduit splices between appurtenances shall not be allowed unless fusion couplings or other fusion methods are used.
9. All cable splices from loop detector cable to lead-in cable at junction boxes shall be watertight.
10. Damage to any existing traffic signal equipment due to the construction shall be the responsibility of the contractor, and the contractor shall report any operational problems to the Traffic Services Maintenance Department (913) 327-6600. The equipment shall be replaced or repaired (as directed by the City) with approved materials in conformance with the current standard details, specifications, practices and policies. The contractor shall be responsible for any stored existing materials (removed for construction) to be re-installed.
11. All existing traffic signal equipment is to be used in place (U.I.P.) unless otherwise noted in the plans.
12. All areas disturbed by construction shall be sodded as directed by the Engineer. The grass medians shall be seeded and brick pavers restored, unless otherwise noted or directed. Sidewalk damaged by construction or removed due to construction shall be replaced as directed, in accordance with the Overland Park Municipal Code requirements.
13. Forms (including rebar cages, etc.) conduit and anchor bolts shall be installed and in place for review by the Inspector a minimum of 24 hours in advance of the proposed concrete placement. No concrete placement shall begin after 3:00 p.m.
14. All loop detectors shall be wet cut with equipment approved by the Engineer. Loops shall be cut prior to the final surface lift, but after review of the pre-marked locations.
15. Luminaire arms shall be oriented in the same vertical plane as the mast arm unless otherwise indicated in the plans.
16. Turn-on of the traffic signal system, shall be in accordance with City Turn-on procedures.
17. All construction of the traffic signal that will result in taking the existing traffic signal out of operation shall be performed on Sunday between 9:00 a.m. and 6:00 p.m. and completed that same day, unless otherwise directed by the Engineer. The City of Overland Park Police Department shall provide officer control of the intersection when the signal is out of operation. The contractor shall notify the police department and the City Traffic Services division at least 72 hours in advance. The Traffic Signal Inspector and the Traffic Signal Specialist shall be present during this time (unless otherwise directed by the Engineer).
18. The traffic signal contractor shall notify the City of Overland Park Department of Public Works, (913) 895-6027, of the exact construction schedule so that inspection of the traffic signal installation can be made of all phases, including conduit installations.
19. The contractor shall be responsible for any damage incurred to any existing underground sprinkler system during construction. All affected pipes or fittings shall be restored to their original condition and location and new materials used shall be similar to those of the existing system. All restoration work shall be acceptable to the Engineer and owner thereof.
20. The contractor shall be required to submit catalog cuts or shop drawings for all equipment to be installed on this project. All materials shall be from the City of Overland Park pre-approved materials list available at City Hall.

[illegible]

21. All signal cable shall be positively identified at the controller and each pole with phase numbers and colored electrical tape as follows:
- | <u>Vehicle Phases</u> | <u>Pedestrian Phases</u> |
|------------------------|--------------------------|
| φ 1 – Purple and White | φ 6 – Purple and Orange |
| φ 6 – Purple | φ 2 – Blue and Orange |
| φ 5 – Blue and White | φ 8 – Yellow and Orange |
| φ 2 – Blue | φ 4 – Red and Orange |
| φ 3 – Yellow and White | |
| φ 8 – Yellow | |
| φ 7 – Red and White | |
| φ 4 – Red | |
22. The contractor shall leave slack cable in poles, service boxes, junction boxes and control center according to the following:
- provide 6' min. slack for all cable in service boxes
 - provide 10' min. slack for all cable in the controller cabinet
 - provide 3' slack for loop cable in the junction box
 - provide 3' slack for loop lead-in cable in the junction box
 - provide 1' min. slack on each side of the cable splice, and for CCTV, EVP and #10 AWG ground cables, at signal poles
23. The contractor shall positively identify the detector loop cables in the junction boxes, where they come in from the street, with wraps of white electrical tape corresponding to the loop number. The cables should be identified according to lane. The inside lane should be marked as number one and increasing outward. All loops shall be connected in series.
24. Within the traffic signal cabinet, the contractor shall use plastic tie-wrap identification tags with permanent marker to identify all of the vehicular and pedestrian heads that are served by each cable. The numbering of the signal heads shall conform to the plan sheets.
25. The contractor, or their supplier, shall, at the contractor's expense, submit a concrete mix design for approval by the Kansas City Metro Materials Board (KCMMB) prior to placement of any concrete. Additional information regarding KCMMB approved concrete mix designs is available on the following website: www.kcmmb.org
26. All non-functioning traffic signal heads shall be covered with approved opaque coverings specifically manufactured for traffic signal heads. The color of the coverings shall be as follows:
- orange at locations of new traffic signals, where no previous signal existed.
 - black at locations of signal modifications such that the coverings do not detract from the functioning signal heads.
27. All existing traffic signals shall remain in operation and be used in place until the permanent traffic signal installation is complete and in operation. Refer to the traffic control plans for additional requirements. The contractor shall coordinate the disconnection of service with Evergy for the existing signal system.
28. All temporary traffic signals installed by the contractor shall be equipped with a 2070 or ASC3 Rackmount controller provided by the contractor for compatibility with the City's signal system.
29. Contractor shall use a polymer lubricating agent to facilitate conduit bores under paved streets. Failure to do so will result in a denial to retrieve bore head by excavation methods, in the case of loss, under any paved street.
30. The ends of all conduit in the controller cabinet shall be plugged with duct seal.
31. All existing concrete foundations, shown to be removed, shall be removed a minimum of 24" below final grade.
32. The contractor shall be required to install inventory stickers on the back of all signs installed on signal poles, or mast arms on the project, and record each respective bar code number on the plan sheet adjacent to the corresponding sign, for delivery to the project inspector. Inventory stickers will be provided by the City.
33. If the final combination signal/streetlight pole is less than ten (10) feet away from the nearest overhead power line, the contractor shall contact Evergy and request them to sleeve their line prior to pole installation, drilling of foundation, or any other associated work. All associated costs shall be the responsibility of the contractor.
34. The contractor shall be required to have all tree branches that obstruct CCTV cameras, radar detection sensors or traffic signal heads trimmed by a licensed arborist.
35. Any equipment the City pre-ordered prior to the contract shall be picked up at the applicable City Maintenance facility at the contractor's expense. All the items must be picked up at one time.
36. The Contractor shall deliver the controller, conflict monitor, Ethernet Switch, CCTV Camera, EVP Discriminator, and etc. to the Traffic Signal Inspector two weeks prior to signal turn-on so the equipment can be programmed.

1. Turn-on should not be scheduled until power is actually available at the service pedestal and all other equipment and hardware is installed.
2. At least two working days prior to scheduled signal activation, all testing should be completed and successful, all defects and deficiencies correct, all indications operational and properly aimed, cables tagged, controller fully operational performing all timing functions required, all other items of work associated with the signal completed, and all signs and pavement markings properly installed unless otherwise approved by the engineer.
3. The City Inspector and Signal Technician will conduct a full inspection of the signal system within these same two days. Upon satisfactory conditions of the signal system, the turn-on schedule will be confirmed. Any deficiencies found during the final inspection shall result in the rescheduling of the activation.
4. If the traffic signal is a new installation where previously none existed, the contractor shall install "SIGNAL AHEAD" (W3-3) and "NEW" (W16-15p) warning signs with orange background and yellow type B flashing beacons advising the motorists of the signal activation. Signs may be installed prior to putting the signal into operation and covered until such time as the signal is placed into full operation. Signs are subsidiary to other items.
5. Actual activation shall consist of the following steps:
 - * installation of all required equipment in the controller cabinet
 - * testing of installed equipment
 - * unbagging of all signal heads and signs if applicable
 - * activation of the signal with the contractor's flagger stopping all traffic momentarily as the signal is turned on.
 - * minor re-aiming of signal heads, if necessary
 - * uncover the signal ahead sign and turn on flashing beacon
6. Activation of the traffic signal shall not be scheduled for weekends, Fridays or days right before public holidays. Activation shall take place in the morning hours only after 9:00 a.m.
7. The contractor shall remove the "Signal Ahead" (W3-3) and "NEW" (W16-15p) warning signs and flashing beacons after one week of operation.
8. Assumption of maintenance operations related to equipment or signal timings within the traffic signal cabinet will be the responsibility of the City of Overland Park and shall occur after successful turn-on to full operation. This applies to temporary traffic signal installations, traffic signal modifications and new traffic signal installations and applies to normal maintenance operations or emergency callouts to take corrective action to return the signal back to full operating condition. Final acceptance by the City is conditional until the contractor has corrected all defects and punch list items. If a traffic signal malfunction occurs between successful turn-on and final acceptance and the signal malfunction is due to faulty work by the contractor, the City of Overland Park Maintenance Division will take corrective action and has the discretion to bill the contractor for all related expense, including overhead.

For Use on Federal Funded Projects

The following is a list of traffic signal equipment which shall be salvaged and stored on site for pickup by the City of Overland Park, unless otherwise instructed by the inspector. All salvaged equipment shall be carefully disassembled and stored. The condition at the time of City pickup shall be the same as prior to removal. The contractor shall notify the City of Overland Park Department of Public Works Inventory Control Specialist at (913) 327-6603 to arrange for the City pickup of the salvaged equipment. Provide 48-hours advance notice.

DELETE WHICHEVER NOTE DOES NOT
APPLY TO THIS PROJECT

The following is a list of traffic signal equipment which shall be salvaged and returned to the City of Overland Park, unless otherwise instructed by the inspector. The condition at the time of delivery shall be the same as prior to removal. Disassembly of equipment shall be done prior to returning the equipment. All equipment, excluding signal poles and mast arms, shall be delivered to the Blue Valley Public Works Maintenance Facility (Traffic Services Maintenance Office and Shop) 6869 W. 153rd Street. Signal poles and mast arms shall be returned to offsite facility near 53rd Street and Renner Road (West of I-435). The contractor shall notify the City of Overland Park Department of Public Works Inventory Control Specialist at (913) 327-6603 to arrange for the delivery of the salvaged equipment. Provide 48-hours advance notice.

The City maintains the first right of refusal of any equipment listed. The project inspector will make an on-site assessment to determine if the equipment should be salvaged or disposed. Any equipment that will not be salvaged shall become the property of the contractor.

1. Emergency Vehicle Pre-emption (EVP) detector units, Video Detection Cameras, Radar Detectors, CCTV cameras, pedestrian pushbuttons and any other equipment must be removed from the mast arms or poles and returned.
2. All vehicular traffic signal heads and pedestrian signal heads shall be removed from the mast arms or poles and be salvaged. All LED indications must be removed from the vehicular signal and or pedestrian traffic signal heads and boxed prior to salvaging. Lamps, visors and backplates should remain attached to the vehicular and pedestrian signal heads.
3. Mounting brackets and signal head mounting arms should be removed from the signal heads. Mounting bracket cables shall not be cut for removal, unless they are cracked or damaged.
4. All signal poles, pedestal poles, mast arms and luminaire arms shall be salvaged. Anchor bolt covers and pole caps must be boxed and or bagged and salvaged with the equipment. Mast arms and luminaire arms shall be removed from poles prior to delivery. The contractor shall be required to remove and discard all included cable except wiring harnesses for radar detection and RWS sensors which shall be salvaged with the equipment.
5. Secondary service pedestal enclosures or battery backup enclosures shall be removed from the traffic signal controller cabinet and returned.
6. Traffic signal controller cabinet and all internal components shall be salvaged. Any traffic signal controller cabinet hardware that is not attached to the cabinet must be boxed and or bagged and returned with the equipment. Field wire connections on salvaged signal controller cabinets shall be unscrewed at the terminals instead of cut off.
7. All compressed natural gas generator assembly units shall be salvaged.
8. All junction box and service box covers and lids shall be salvaged if in good condition.
9. Disassembly of any streetlight equipment that is attached to the traffic signal equipment shall follow the guidelines as stated in the "instructions for disassembly and return of salvaged streetlighting equipment".
10. Disassembly of any traffic sign equipment attached to the traffic signal equipment shall follow the guidelines as stated in the "instructions for disassembly and return of salvaged traffic sign equipment".

[illegible]

1. The contractor shall stake the locations for all poles, controllers, service boxes and junction boxes to be installed. The stations and offsets provided are to the center of the traffic signal equipment. Elevations shall be provided. If obstructions are encountered during installation, the contractor will re-stake those locations affected by the obstruction. The traffic signal inspector shall inspect the staking prior to any excavation/construction.
2. The locations of existing underground utilities, if shown, are approximate location only and have not been independently verified. The contractor shall be responsible for contacting all utility companies for locations of all underground lines prior to excavation and be fully responsible for any and all damages, which might be occasioned by the contractor's failure to exactly locate and preserve any and all underground utilities.
3. The City of Overland Park is on the KS OneCall System. The contractor shall call 811 to obtain locates for streetlighting, traffic signal, and fiber optic conduits/cables. Irrigation systems are not considered an underground utility and identification is not required by the owner.
4. The contractor shall be responsible for removing existing equipment as noted and delivering all salvageable equipment to the City of Overland Park Blue Valley Maintenance Facility, 6869 W. 153RD Street. The contractor shall contact the Inventory Control Specialist at (913) 327-6603 to coordinate delivery (at least 24-hour advance notice shall be provided). All returned equipment shall be disassembled per the instructions of the Traffic Services Division of the City of Overland Park Department of Public Works located on this sheet. The contractor shall be responsible for any damage or loss of salvageable equipment.
5. All conduit trenches and pre-drilled holes within rock/shale shall be backfilled with suitable material and compacted in accordance with the specifications.
6. Conduits shall be installed under all streets, drives and sidewalks prior to paving within the limits of the street improvements. The conduit placement shall be coordinated with the paving operation, if applicable, and inspected by the City Traffic Signal Inspector. (See Trench Details)
7. The conduit shall be installed under any existing underdrain pipe crossings and underdrain blankets. Where pole foundations are to be installed through an existing underdrain blanket, the blanket shall be pre-cut to prevent damage of the blanket. In the event the blanket is damaged, the fabric shall be replaced.
8. HDPE conduit shall be installed continuously between all traffic signal appurtenances. Conduit splices between appurtenances shall not be allowed unless fusion couplings or other fusion methods are used.
9. All cable splices from loop detector cable to lead-in cable at junction boxes shall be watertight.
10. Damage to any existing traffic signal equipment due to the construction shall be the responsibility of the contractor. The contractor shall report any operational problems to the Traffic Services Maintenance Department (327-6600). The equipment shall be replaced or repaired (as directed by the City) with approved materials in conformance with the current standard details, specifications, practices and policies. The contractor shall be responsible for any stored existing materials (removed for construction) to be re-installed.
11. All existing traffic signal equipment is to be used in place (U.I.P.) unless otherwise noted in the plans.
12. All areas disturbed by construction shall be sodded as directed by the Engineer. The grass medians shall be seeded and brick medians restored, unless otherwise noted or directed. Sidewalk damaged by construction or removed due to construction shall be replaced as directed, in accordance with the Overland Park Municipal Code requirements.
13. Forms (including rebar cages, etc.) conduit and anchor bolts shall be installed and in place for review by the Inspector a minimum of 24 hours in advance of the proposed concrete placement. No concrete placement shall begin after 3:00 p.m.
14. All loop detectors shall be wet cut with equipment approved by the Engineer. Loops shall be cut prior to the final surface lift, but after review of the pre-marked locations.
15. Luminaire arms shall be oriented in the same vertical plane as the mast arm unless otherwise indicated in the plans.
16. Turn-on of the traffic signal system shall be in accordance with City turn-on procedures.
17. All construction of the traffic signal that will result in taking the existing traffic signal out of operation shall be performed on Sunday between 9:00 a.m. and 6:00 p.m. and completed that same day, unless otherwise directed by the Engineer. The City of Overland Park Police Department shall provide officer control of the intersection when the signal is out of operation. The contractor shall notify the Police Department and the City Traffic Services Division at least 72 hours in advance. The traffic signal inspector and the traffic signal specialist shall be present during this time (unless otherwise directed by the Engineer).
18. The traffic signal contractor shall notify the City of Overland Park Department of Public Works, (913) 895-6027, of the exact construction schedule so that inspection of the traffic signal installation can be made of all phases, including conduit installations.
19. The contractor shall be responsible for any damage incurred to any existing underground sprinkler system during construction. All affected pipes or fittings shall be restored to their original condition and location and new materials used shall be similar to those of the existing system. All restoration work shall be acceptable to the Engineer and owner thereof.
20. The contractor shall be required to submit catalog cuts or shop drawings for all equipment to be installed on this project. All materials shall conform to the City of Overland Park pre-approved materials list which is available at City Hall.
21. The contractor, or their supplier, shall, at the contractor's expense, submit a concrete mix design for approval by the Kansas City Metro Materials Board (KCMMB) prior to placement of any concrete. Additional information regarding KCMMB approved concrete mix designs is available on the following website: www.kcmmb.org

[illegible]


1. Turn-on should not be scheduled until power is actually available at the service pedestal and all other equipment and hardware is installed.
2. At least two working days prior to scheduled signal activation, all testing should be completed and successful, all defects and deficiencies correct, all indications operational and properly aimed, cables tagged, controller fully operational performing all timing functions required, all other items of work associated with the signal completed, and all signs and pavement markings properly installed unless otherwise approved by the engineer.
3. The City Inspector and Signal Technician will conduct a full inspection of the signal system within these same two days. Upon satisfactory conditions of the signal system, the turn-on schedule will be confirmed. Any deficiencies found during the final inspection shall result in the rescheduling of the activation.
4. If the traffic signal is a new installation where previously none existed, the contractor shall install "SIGNAL AHEAD" (W3-3) and "NEW" (W16-15p) warning signs with orange background and yellow type B flashing beacons advising the motorists of the signal activation. Signs may be installed prior to putting the signal into operation and covered until such time as the signal is placed into full operation. Signs are subsidiary to other items.
5. Actual activation shall consist of the following steps:
 - * installation of all required equipment in the controller cabinet
 - * testing of installed equipment
 - * unbagging of all signal heads and signs if applicable
 - * activation of the signal with the contractor's flagger stopping all traffic momentarily as the signal is turned on.
 - * minor re-aiming of signal heads, if necessary
 - * uncover the signal ahead sign and turn on flashing beacon
6. Activation of the traffic signal shall not be scheduled for weekends, Fridays or days right before public holidays. Activation shall take place in the morning hours only after 9:00 a.m.
7. The contractor shall remove the "Signal Ahead" (W3-3) and "NEW" (W16-15p) warning signs and flashing beacons after one week of operation.
8. Assumption of maintenance operations related to equipment or signal timings within the traffic signal cabinet will be the responsibility of the City of Overland Park and shall occur after successful turn-on to full operation. This applies to temporary traffic signal installations, traffic signal modifications and new traffic signal installations and applies to normal maintenance operations or emergency callouts to take corrective action to return the signal back to full operating condition. Final acceptance by the City is conditional until the contractor has corrected all defects and punch list items. If a traffic signal malfunction occurs between successful turn-on and final acceptance and the signal malfunction is due to faulty work by the contractor, the City of Overland Park Maintenance Division will take corrective action and has the discretion to bill the contractor for all related expense, including overhead.

The following is a list of traffic signal equipment which shall be salvaged and returned to the City of Overland Park, unless otherwise instructed by the inspector. The City maintains the first right of refusal on any of the equipment listed. The project inspector will make an on-site assessment to determine if the equipment should be salvaged or disposed. Any equipment that will not be salvaged shall become of the property of the contractor.


22. All signal cable shall be positively identified at the controller and each pole with phase numbers and colored electrical tape as follows:
- | <u>Vehicle Phases</u> | <u>Pedestrian Phases</u> |
|-----------------------|--------------------------|
| 01 – Purple & White | 06 – Purple and Orange |
| 06 – Purple | 02 – Blue and Orange |
| 05 – Blue & White | 08 – Yellow and Orange |
| 02 – Blue | 04 – Red and Orange |
| 03 – Yellow & White | |
| 08 – Yellow | |
| 07 – Red & White | |
| 04 – Red | |
23. The Contractor shall leave slack cable in poles, service boxes, junction boxes and control center according to the following:
- Provide 6' min. slack for all cable in service boxes
 - Provide 10' min. slack for all cable in the controller cabinet
 - Provide 3' min. slack for loop cable in the junction box
 - Provide 3' min. slack for loop lead-in cable in the junction box
 - Provide 1' min. slack on each side of the cable splice, and for CCTV, EVP and #10 AWG ground cables, at signal poles.
24. The contractor shall positively identify the detector loop cables in the junction boxes, where they come in from the street, with wraps of white electrical tape corresponding to the loop number. The cables should be identified according to lane. The inside lane shall be marked as number one and increasing outward. All loops shall be connected in series.
25. Within the traffic signal cabinet, the contractor shall use plastic tie-wrap identification tags with permanent marker to identify all of the vehicular and pedestrian heads that are served by each cable. The numbering of the signal heads shall conform to the plan sheets.
26. All non-functioning traffic signal heads shall be covered with approved opaque coverings specifically manufactured for traffic signal heads. The color of the coverings shall be as follows:
- Orange at locations of new traffic signals, where no previous signal existed.
 - Black at locations of signal modifications such that the coverings do not detract from the functioning signal heads.
27. All existing traffic signals shall remain in operation and be used in place until the permanent traffic signal installation is complete and in operation. Refer to the traffic control plans for additional requirements. The contractor shall coordinate the disconnection of service with Evergy for the existing signal system.
28. All temporary traffic signals installed by the contractor shall be equipped with a 2070 or ASC3 Rackmount controller provided by the contractor for compatibility with the City's signal system.
29. Contractor shall use a polymer lubricating agent to facilitate conduit bores under paved streets. Failure to do so will result in a denial to retrieve bore head by excavation methods, in the case of loss, under any paved street.
30. The ends of all conduits in the controller cabinet shall be plugged with duct seal.
31. All existing concrete foundations, shown to be removed, shall be removed a minimum of 24" below final grade.
32. The traffic signal contractor shall be required to furnish evidence that their insurance meets the requirements of Chapter 13.01 of the City of Overland Park, Kansas, Municipal Code.
33. All traffic control in conjunction with the traffic signal construction shall be in conformance with the Manual on Uniform Traffic Control Devices and the Overland Park Traffic Control Handbook for Street Maintenance and Construction Operations.
34. The traffic signal contractor shall be responsible for removal of all undesirable material (rock and debris) encountered during traffic signal construction. The owner or his/her representative will designate a location on the owner's property for placing all excess rock, debris, etc. before proceeding with construction. The traffic signal contractor shall verify that the right-of-way has been properly graded and in a mowable condition.
35. The contractor shall be required to install inventory stickers on the back of all signs installed on signal poles, or mast arms on the project, and record each respective bar code number on the plan sheet adjacent to the corresponding sign, for delivery to the project inspector. Inventory stickers will be provided by the City.
36. If the final combination signal/streetlight pole is less than ten (10) feet away from the nearest overhead power line, the contractor shall contact Evergy and request them to sleeve their line prior to pole installation, drilling of foundation, or any other associated work. All associated costs shall be the responsibility of the contractor.
37. The contractor shall be required to have all tree branches that obstruct CCTV cameras, radar detection sensors or traffic signal heads trimmed by a licensed arborist.
38. Any equipment the City pre-ordered prior to the contract shall be picked up at the applicable City Maintenance facility at the contractor's expense. All the items must be picked up at one time.
39. The Contractor shall deliver the controller, conflict monitor, Ethernet Switch, CCTV Camera, EVP discriminator, etc. to the Traffic Signal Inspector two weeks prior to signal turn-on so the equipment can be programmed.

2. All vehicular traffic signal heads and pedestrian signal heads shall be removed from the mast arms or poles and be returned. All LED indications must be removed from the vehicular signal head and or pedestrian signal heads and boxed prior to returning. Lamps, visors and backplates should remain attached to the vehicular and pedestrian signal heads.
3. Mounting brackets and signal head mounting arms should be removed from the signal heads. Mounting bracket cables shall not be cut for removal, unless they are cracked or damaged.
4. All signal poles, pedestal poles, mast arms and luminaires arms shall be returned. Anchor bolt covers and pole caps must be boxed and or bagged and returned with the equipment. Mast arms and luminaires arms shall be removed from poles prior to delivery. The contractor shall be required to remove and discard all included cable except wiring harnesses for radar detection and RWS sensors which shall be returned with the equipment.
5. Secondary service pedestal enclosures or battery backup enclosures shall be removed from the traffic signal controller cabinet and returned.
6. Traffic signal controller cabinet and all internal components shall be returned. Any traffic signal controller cabinet hardware that is not attached to the cabinet must be boxed and or bagged and returned with the equipment. Field wire connections on returned signal controller cabinets shall be unscrewed at the terminals instead of cut off.
7. All compressed natural gas generator assembly units shall be returned.
8. All junction boxes and service boxes and lids shall be salvaged if in good condition.
9. Disassembly of any streetlight equipment that is attached to the traffic signal equipment shall follow the guidelines as stated in the "instructions for disassembly and return of salvaged streetlighting equipment".
10. Disassembly of any traffic sign equipment attached to the traffic signal equipment shall follow the guidelines as stated in the "instructions for disassembly and return of salvaged traffic sign equipment".


All traffic signal equipment, excluding signal poles and mast arms, to be returned shall be returned in the same condition as it was prior to removal. Disassembly of equipment shall be done prior to returning the equipment to the Blue Valley Public Works Maintenance Facility (Traffic Services Maintenance Office and Shop) 6869 W. 153rd Street. Signal poles and mast arms shall be returned to the offsite facility near 53rd Street and Renner Road (West of I-435). Provide 48-hours advance notice for the delivery of poles and mast arms.

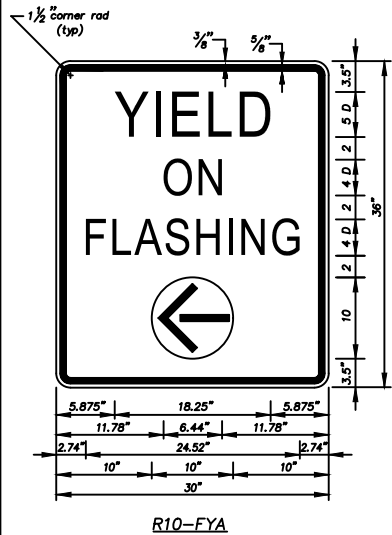



Signal Phasing

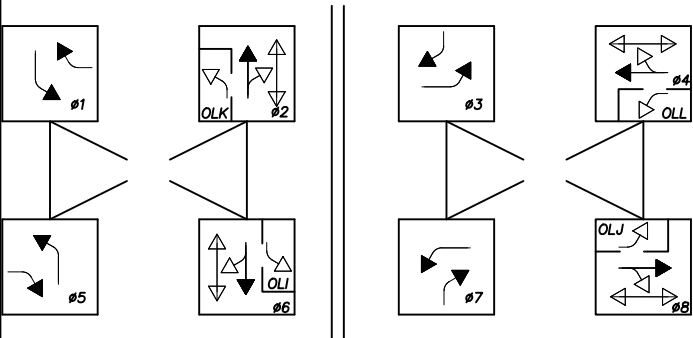

Phasing Diagram

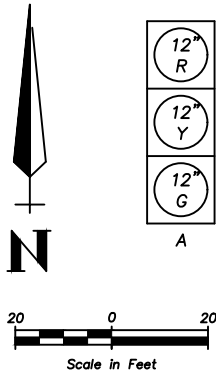


Signal Faces

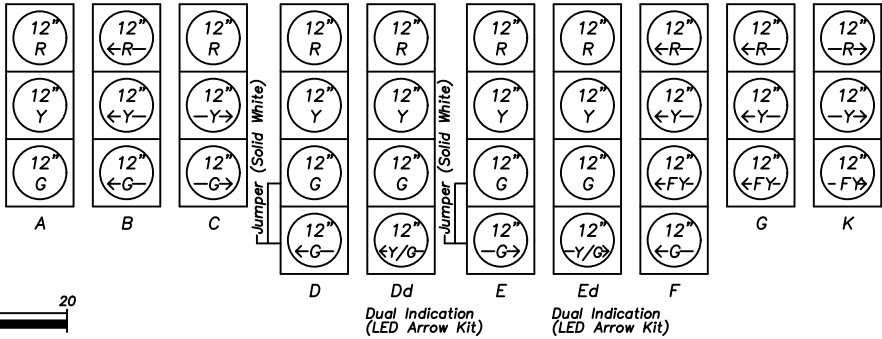

Phase Timings Plan								
Option	Phase							
	1	2	3	4	5	6	7	8
Phase Minimum Green								
Phase Walk								
Phase Pedestrian Clear								
Phase Passage								
Phase Passage 2								
Phase Maximum 1								
Phase Maximum 2								
Phase Yellow Change								
Phase Red Clear								


Flashing Operations	
-----	FR
-----	FR
Pedestrian Heads	Dark
- Left	--
- Left	--



Ped. Pushbutton Detail


Construction Notes:

- 1
- 2
- 3

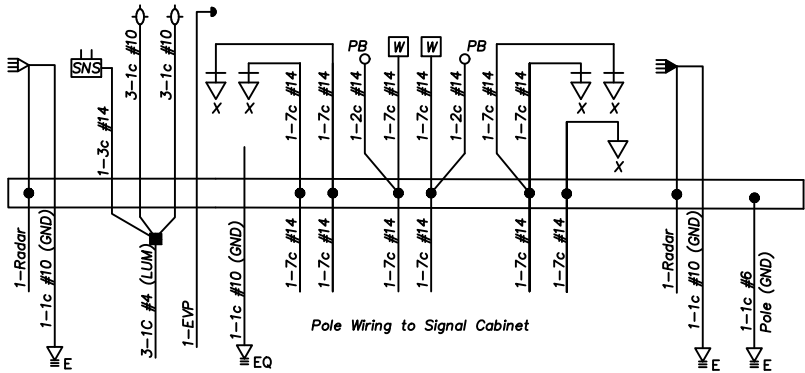


Pole Wiring to Signal Cabinet

Pole # _____

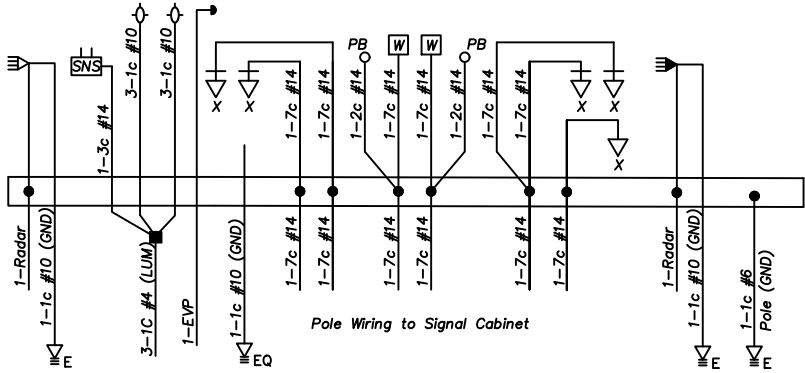


Pole Wiring to Signal Cabinet

Pole # _____

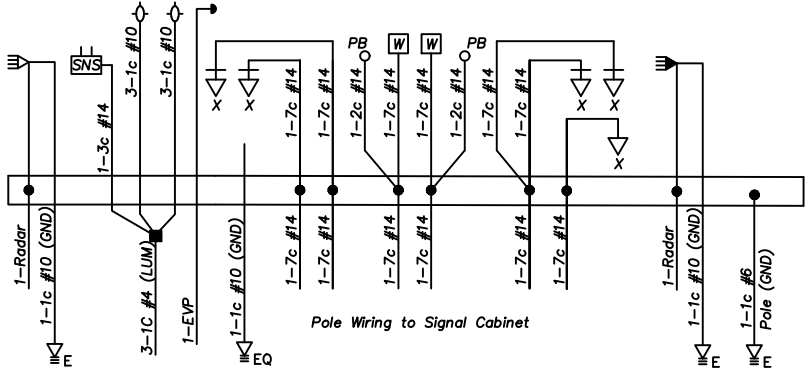

Pole Wiring to Signal Cabinet

Pole # _____

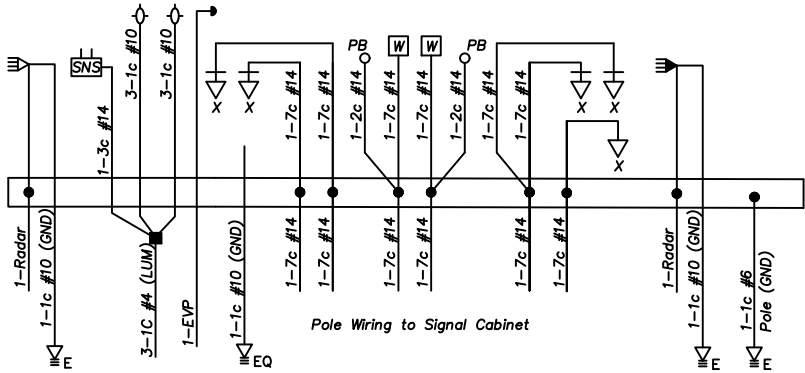


Pole Wiring to Signal Cabinet

Pole # _____

- Legend**
- Video Detection Camera
 - Advance Radar Detector
 - Presence Radar Detector
 - Closed Circuit TV (CCTV) Camera
 - EVP Detector
 - Illuminated Street Name Sign (If Applicable)
 - Streetlight
 - Traffic Signal Head
 - Pedestrian Signal Head
 - PB Pedestrian Pushbutton
 - Streetlight Electrical Connectors
 - Connection in Pole Base
 - Earth Ground
 - Equipment Ground


Notes:

1. Tape individual wire nuts or connectors at the base of each pole. Then tape all groups of wire together.
2. Wiring for CCTV and emergency pre-emption (EVP) detectors shall be continuous with no splices to the controller. Provide 2' of slack at the base of the pole.
3. Pigtail connectors from the radar detection sensors to the base of the pole shall be performed by the supplier. Connections to the home run cable shall be made with self-stripping gel-filled electrical pigtail connectors.

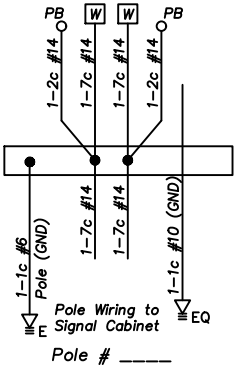

Pole Wiring to Signal Cabinet

Pole # _____

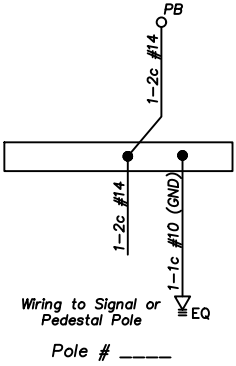

Wiring to Signal or Pedestal Pole

Pole # _____

Pole Wiring Details
No Scale

Example:
Order— Callout'
2" COND.
1—7c
1—7c (PED)
1—RADAR
1—EVP
1—CCTV
3—1c#4 (LUM)
1—1c#10 (GND)

Notes:

1. All wire to be #14 AWG unless otherwise noted.
2. All conduit to be high density polyethylene conduit (HDPE) (Black w/ White Stripe) unless otherwise noted.
3. 2" COND. Indicates existing equipment to be Used In Place unless otherwise noted.
4. 3—7c Indicates existing cable to be Used In Place unless otherwise noted.
5. ————— Indicates existing cable/conduit
6. ++++++ Indicates existing equipment to be removed or abandoned as called out in the plans
7. /3+76/ Indicates existing cable to be removed
8. < > Indicates cable/conduit installed for future use



TRAFFIC SIGNAL INTERSECTION WIRING DIAGRAM		2019 Standard Details			CITY OF OVERLAND PARK DEPARTMENT OF PUBLIC WORKS	
SHEET NO.	TOTAL SHEETS				DATE	BY
		1	2	3		
		NO.				
06	53					

Bill of Materials (1)

Cabinet Related Items			
Item		Unit	Quant.
Compressed Natural Gas (CNG) Generator & Cabinet with Landscaping		Each	—
Secondary Aluminum Service Enclosure w/30amp Main		Each	—
Battery Backup UPS System and Accessories		Each	—
Manual Power Bypass Switch/30amp		Each	—
ATC Cabinet (Double Wide) w/ 8" Riser		Each	—
ATC Cabinet (Single Wide) w/ 8" Riser		Each	—

Concrete Foundation Items		
Item	Unit	Quant.
Concrete Controller Cabinet Pad (Single Wide)	Each	—
Concrete Controller Cabinet Pad (Double Wide)	Each	—
Concrete Compressed Natural Gas (CNG) Generator Pad	Each	—
Concrete Traffic Signal Pole Foundation W/ Cap and Anchor Bolts	Each	—
Concrete Pedestal Pole Foundation W/ Cap and Anchor Bolts	Each	—
Concrete Pedestrian Pushbutton Pole Foundation and Anchor Bolts	Each	—
Ground Rod & Clamp(s) (5/8" x 10') for Poles and Cabinet Foundation	Each	—

Conduit / Cable		
Item	Unit	Quant.
SDR 13.5 HDPE (Orange) Fiber Optic Conduit 2"	Ln. Ft.	—
SDR 13.5 HDPE (Orange) Fiber Optic Conduit 3"	Ln. Ft.	—
SDR 13.5 HDPE (Black w/ White Stripe) Signal Conduit 1.5"	Ln. Ft.	—
SDR 13.5 HDPE (Black w/ White Stripe) Signal Conduit 2"	Ln. Ft.	—
SDR 13.5 HDPE (Black w/ White Stripe) Signal Conduit 3"	Ln. Ft.	—
SDR 13.5 HDPE (Black w/ White Stripe) Signal Conduit 4"	Ln. Ft.	—
SDR 13.5 HDPE (Black w/ Red Stripes) or Sch 40 PVC (Gray) Electrical Service Conduit 2"	Ln. Ft.	—
Video Detection Cable	Ln. Ft.	—
CNG Monitoring Cable 3c #14 AWG	Ln. Ft.	—
CNG Power Cable 3c #2 AWG	Ln. Ft.	—
CNG Alarm Cable 2c #14 AWG	Ln. Ft.	—
CCTV Camera Cat 6 Data Cable	Ln. Ft.	—
Radar Detector Home Run Cable (3 Pair)	Ln. Ft.	—
Illuminated Street Name Sign Cable 3c #14 AWG	Ln. Ft.	—
Solid Bare Copper Ground Wire 1c #6 AWG	Ln. Ft.	—
Detector Loop Wire 1c #14 AWG THHN/THWN in PVC Tube	Ln. Ft.	—
Shielded Detector Lead-in 2c #14 AWG	Ln. Ft.	—
Multi-Conductor Cable 2c #14 AWG (From Ped Pushbutton to Traffic Signal Pole Base)	Ln. Ft.	—
Multi-Conductor Cable 7c #14 AWG	Ln. Ft.	—
Emergency Vehicle Pre-emption (EVP) Cable	Ln. Ft.	—
Stranded Copper Ground Cable (Green) 1c #10 AWG THHN/THWN	Ln. Ft.	—
Stranded Copper Locating Cable (Red) 1c #10 AWG THHN/THWN	Ln. Ft.	—
Electrical Service Power Cable 3-1c #4 AWG	Ln. Ft.	—
Ethernet Cables (6' long)	Each	—

Detection / CCTV Equipment		
Item	Unit	Quantity
Pedestrian Pushbutton	Each	—
Audible Pedestrian Pushbutton w/ Accessories and Sign (R10–3e) 9" x 15"	Each	—
Emergency Vehicle Pre-emption (EVP) Detector	Each	—
CCTV Dome Camera w/ RJ-45 Connector Kit and High PoE Midspan 1-port	Each	—
CCTV Quad Camera w/ RJ-45 Connector Kit and High PoE Midspan 1-port	Each	—
Advance Radar Detector Sensor w/ Harness Cable	Each	—
Presence Radar Detector Sensor w/ Harness Cable	Each	—

Item	Unit	Quantity
Mast Arm Bracket (3 Section Head)	Each	—
Mast Arm Bracket (4 Section Head)	Each	—
Side Pole Bracket (Vehicular and Pedestrian Heads)	Each	—
Mini Astro Brac for Emergency Vehicle Pre-emption (EVP) Detector	Each	—
Radar Detector Mounting Bracket	Each	—
CCTV Camera Mounting Bracket Equipment for Specified Camera	Each	—

Signing		
Item	Unit	Quant
R10-17a (36"x48") Right on Red Arrow After Stop" w/ Bracket	Each	—
R10-FYA (30" x 36") "Yield on Flashing (Symbolic Yellow Arrow)" w/ Bracket	Each	—
R3-4 Sign (36" x 36") "No U-Turn" w/ Bracket	Each	—
R10-11b Sign (36" x 36") "No Turn on (Red)" w/ Bracket	Each	—
R10-3e Sign (9" x 15") "Pedestrian Push Button" w/ Steel Bands	Each	—
D3-1 Overhead Street Name Signs (Varies in Size) w/ Bracket	Each	—
Illuminated Street Name Signs (_____ x 19") w/ Mounting Brackets	Each	—
Illuminated Street Name Signs (_____ x 24") w/ Mounting Brackets	Each	—

Streetlighting Equipment		
Item	Unit	Quant.
Class A LED Cobra-Head Luminaire	Each	—
Class B LED Cobra-Head Luminaire	Each	—
Class C LED Cobra-Head Luminaire	Each	—
8 AMP Fuse	Each	—
Break-Away Non-Fused Connector Kits	Each	—
Break-Away Fused Connector Kits	Each	—
Multiple Street Light Tap Connector	Each	—
Lighting Cable #4 AWG 3-1c Type USE	Ln. Ft.	—
Pole & Bracket Cable #10 AWG 1c Type THHN/THWN	Ln. Ft.	—

Miscellaneous		
Item	Unit	Quant.
Install City-Supplied Traffic Signal Mast Arm	Each	—
Remove/Relocate Existing Equipment	L.S.	—
Every Service Pedestal & Ground Rod (Provided by Every and Picked Up By Contractor)	Each	—

Signal Heads		
Item	Unit	Quant.
Pedestrian Signal Head (1 Section) (See Chart A)	Each	—
Traffic Signal Head (See Chart A)	Each	—
Backplate 5" (3 Section)	Each	—
Backplate 5" (4 Section)	Each	—
Red Arrow LED Kit	Each	—
Yellow Arrow LED Kit	Each	—
Green Arrow LED Kit	Each	—
Red Ball LED Kit	Each	—
Yellow Ball LED Kit	Each	—
Green Ball LED Kit	Each	—
Dual Indication Green/Yellow LED Arrow Kit	Each	—
Orange/White "Hand/Person" Countdown LED Kit	Each	—



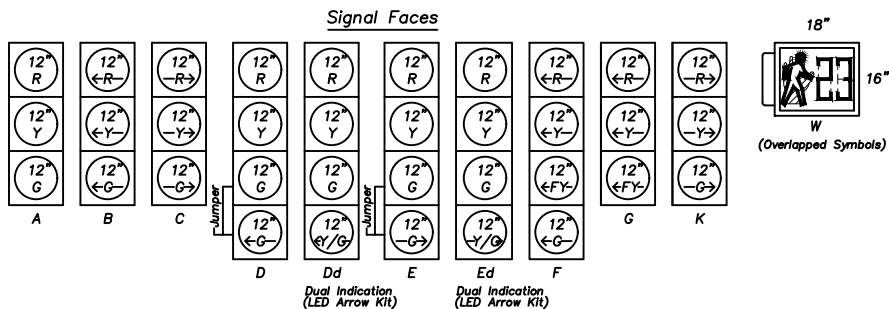
[illegible][illegible]

Chart B Notes:

- (1) Manufacturer shall certify that all poles conform to the 2013 edition of the AASHTO standard specifications for structural supports for highway signs, luminaires and traffic signals.
- (2) Engineer to confirm signal component spacing prior to arm drilling and head installation.
- (3) When combination traffic signal/street light poles are specified to be supplied without the mast arms, The pole manufacturer shall be required to provide a steel or aluminum plate attachment to the mast arm plate with hardware to cover the cable entry hole.

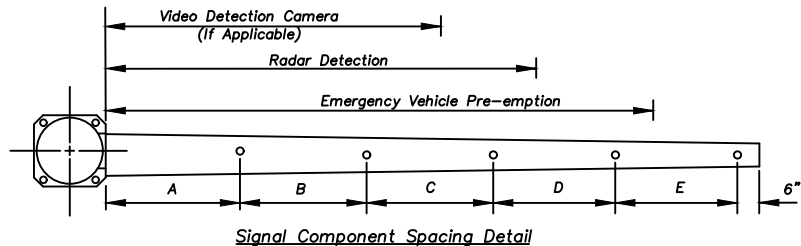

Included Angle Detail
for Dual Mast Arms

Chart B Legend:

- PRAD = Presence Radar Detector
ARAD = Advance Radar Detector
EVP = Emergency Vehicle Pre-emption Detector

Traffic Signal Poles		
Item	Unit	Quant.
Traffic Signal Steel Pole (See Chart B)	Each	—
Traffic Signal Aluminum Pedestal Pole (14') and Base	Each	—
Traffic Signal Aluminum Pedestal Pole (13') and Base	Each	—
Traffic Signal Aluminum Pedestal Pole (9') and Base	Each	—
Traffic Signal Aluminum Pedestrian Push Button Pole	Each	—
Traffic Signal Mast Arm (See Chart B)	Each	—
Luminaire Bracket Arm (12 ft) (See Also Chart B)	Each	—
Luminaire Bracket Arm (8 ft) (See Also Chart B)	Each	—



Traffic Signal Boxes		
Item	Unit	Quant.
Service Box Type 1	Each	—
Service Box Type 2	Each	—
Junction Box Type 1	Each	—
Junction Box Type 2	Each	—
Fiber Optic Service Box Type 1	Each	—
Fiber Optic Service Box Type 2	Each	—
Ground Rod & Clamp (5/8" x 8') for Service Boxes	Each	—

Major Electronic Equipment Items		
Item Description	Unit	Quant.
ATC Controller Unit w/ Firmware	Each	—
Cabinet Monitor Unit (CMU)	Each	—
High Density Switch Pack	Each	—
High Density Flash Transfer Relay	Each	—
Serial Interface Unit (SIU)	Each	—
Auxiliary Display Unit (ADU)	Each	—
Cabinet Alarm Panel	Each	—
242 DC Isolator	Each	—
Surge Protector (Traffic Signal Cabinet)	Each	—
Utility Power Surge Protector (Secondary Service Pedestal)	Each	—
EVP Discriminator Module 2—Channel	Each	—
EVP Discriminator Module 4—Channel	Each	—
Radar SDLC Cabinet Interface Device (4—Port)	Each	—
Radar SDLC Cabinet Interface Device (6—Port)	Each	—
RJ—45 Data Protector for CCTV Cameras	Each	—
Two Channel Detector Card	Each	—
Four Channel Detector Card	Each	—


Bill of Materials Notes:

- (1) These approximate quantities were prepared solely for the contractor's convenience. It is not guaranteed that this list of materials constitutes all items required for the completion of the work. Unless otherwise noted, the installation/modification shall be bid "lump sum" for all necessary equipment.
- (2) City to furnish equipment for contractor installation, if designated.
- (3) Quantities for these items are included in the street lighting bill of materials.
- (4) Quantities for these items are included in the fiber optic bill of materials.
- (5) All sign sheeting shall be micro-encapsulated prismatic sheeting (Type XI).
- (6) Quantities for these items are included in the overhead street name sign quantity table.
- (7) A certified field service technician shall be on site at turn-on of CNG generators and battery backup systems.
- (8) See illuminated street name signs details for wiring diagrams, sizes and location.
- (9) Supplier shall set up count zones for each intersection approach.
- (10) All LED Cobra-Head luminaires shall have a minimum 10 year manufacturer's warranty.

1. Final pole, anchor bolt size, anchor bolt projection, and bolt circle shall be as per manufacturer's recommended practices (See Table 1). Rotate anchor bolt to maintain minimum clearance from edge of hole. All anchor bolt threads and nut surfaces shall be lubricated prior to tightening with stick wax or approved alternative.
2. All conduits and anchor bolts for all the new pole bases shall be rigidly installed before concrete is placed. Anchor bolts shall be spaced by means of a factory certified template or drawing, the center of which shall coincide with the center of the base.
3. All concrete used in this work shall meet the requirements of the Overland Park Municipal Code and shall be KCMMB5K concrete ($f'_c = 5,000$ psi) with a 7" slump. Poles shall not be erected until concrete has reached 3,500 psi.
4. Maintain 3" minimum clearance from reinforcing steel to edge of hole or form.
5. The drilled shaft foundation details presented herein are intended for installation into soil foundations. A special foundation investigation and design shall be conducted for residual soils with an "N" value of 4 or less or characterized as very soft to soft clay.
6. These standard designs assume a minimum compactive effort of 90% of Standard or Modified Proctor for cohesive fill material.
7. In the event excavation for the drilled shaft encounters sound limestone short of the required length shown in the table of dimensions, the shaft may be shortened to a minimum length of 8 feet with a minimum inclusive rock socket of 3 feet.
8. Shale foundation material will be considered as a stiff clay. Drilled shafts in shale must satisfy the dimensions on Table 2.
9. All concrete pole bases shall be consolidated by an internal type vibrator.
10. Final 6" of concrete foundation (pole cap) shall be formed square. The cap shall be formed and poured after the mast arm is erected and the pole plumb. Pole cap for pedestal pole shall be required at inspector discretion. Final top elevation shall match ADA sidewalk ramp.
11. PVC conduit elbows in concrete foundations shall be connected to HDPE conduit with PVC pipe nipple and approved PVC to HDPE couplings. All PVC pipe nipples, elbows, and couplings shall be considered subsidiary to the traffic signal pole base.
12. Bare No. 6 solid copper ground conductor shall be connected from internal pole grounding nut with a ring terminal to the clamp on the ground rod. Connect 1c#10 AWG system ground wire to separate ground rod clamp.
13. All reinforcing steel shall be ASTM A615 Grade 60 for KCMMB5K concrete.
14. All concrete surfaces should be brushed and sealed with curing compound.
15. Contractor shall use drill shaft wheels and rebar support boots to maintain 3" clearance to shaft wall and shaft bottom, respectively, for all mast arm foundations.
16. Contractor to provide ground rod(s) as required for maximum 25 ohms resistance to ground. Contractor shall be required to test with the inspector present.
17. Contractor shall be required to place concrete foundations within 48 hours after completion of drilling. Contractor shall maintain the integrity of the hole until concrete is placed.

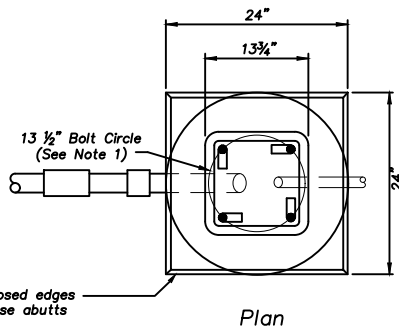


Bolt Diameter	Plate Thickness "M"	Maximum Projection "p"
0.75"	0.75"	2 $\frac{1}{4}$ " $\pm$ $\frac{1}{4}$ "
1.50"	2.00"	6 $\frac{1}{4}$ " $\pm$ $\frac{1}{4}$ "
1.75"	2.00"	6 $\frac{3}{4}$ " $\pm$ $\frac{1}{4}$ "
1.75"	2.25"	7" $\pm$ $\frac{1}{4}$ "
2.00"	2.25"	7 $\frac{1}{2}$ " $\pm$ $\frac{1}{4}$ "

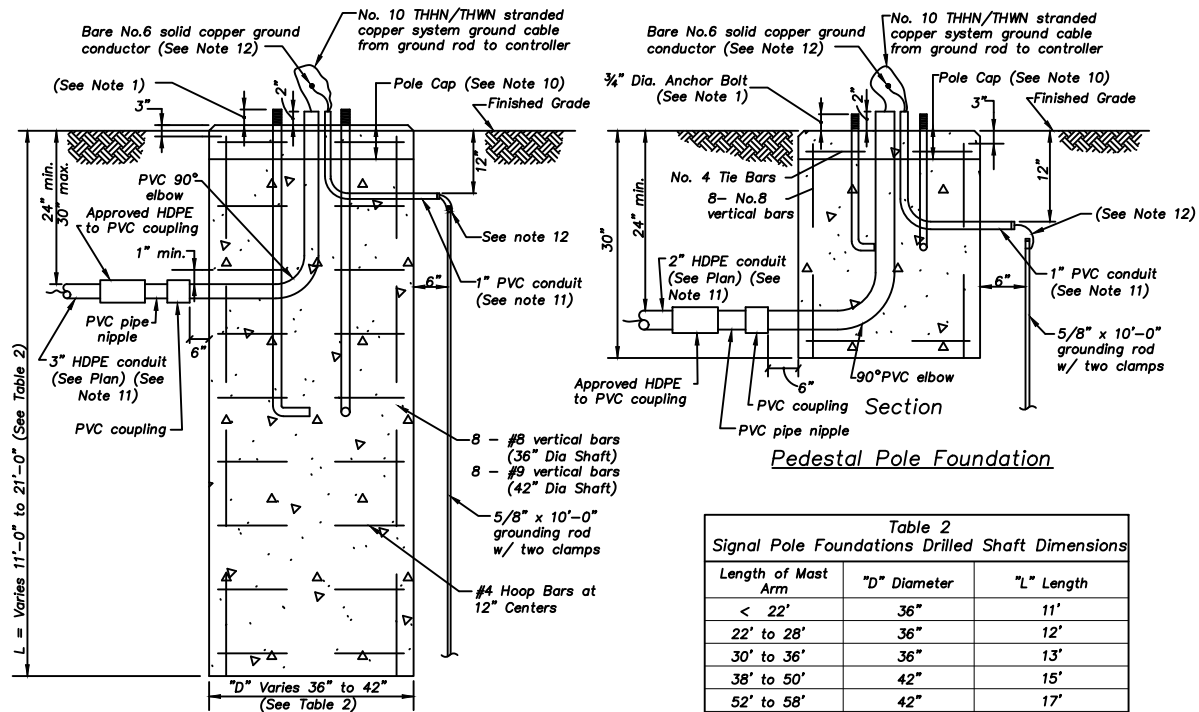

Traffic Signal Pole Foundation


Length of Mast Arm	"D" Diameter	"L" Length
< 22'	36"	11'
22' to 28'	36"	12'
30' to 36'	36"	13'
38' to 50'	42"	15'
52' to 58'	42"	17'
60' to 70'	42"	21'
> 70'	Requires Special Design	

September 1, 2021, 1:38 PM
K:\Details_Specs\Drawings\Traffic\Signal Progress\Current MASTER Sheets\2021 Traffic Signal Details - MASTER.dwg
JH/ler

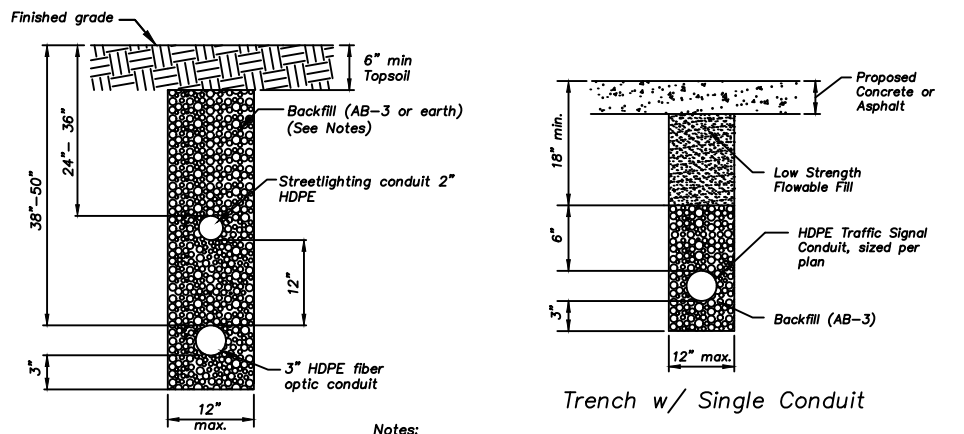


- Notes:**
1. All trenches for conduit under proposed paved surfaces (drives, streets, and sidewalks) shall be backfilled with AB-3 to 6" above the conduit and then low strength flowable fill to below the proposed paved surface or existing terrain, unless otherwise directed.
 2. Backfill in unpaved areas shall be free of rubble and rock.
 3. If multiple conduits are installed, they shall have a minimum of 12" horizontal or vertical clearance between them.
 4. Details are typical and information for the separation of multiple conduits are applicable whether trenching in unpaved or paved areas.

Trenching Details

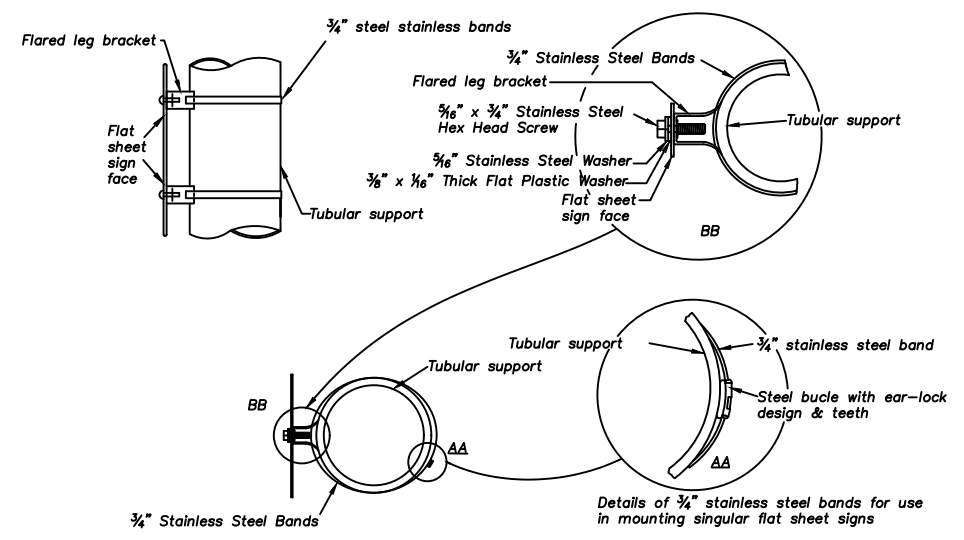

Side of Pole Sign Mounting Detail

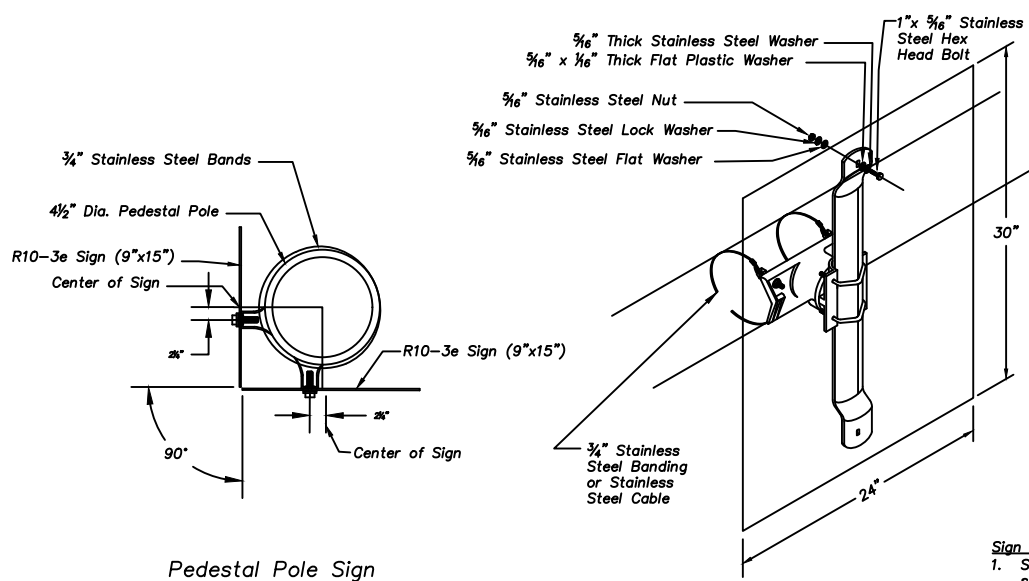


Pedestal Pole Sign Mounting Detail


Mast Arm Sign Mounting Bracket Detail

Sign Mounting Details

- Signal Controller Pad Notes:**
1. All conduits and anchor bolts shall be rigidly installed before concrete is placed.
 2. Top of pad to be sloped to drain toward PVC drain. Drain can be relocated as necessary to match conditions.
 3. A 1-c#10 THHN/THWN stranded copper system ground cable shall be installed through one of the HDPE conduits between the controller and closet service box (See controller cabinet grounding detail).
 4. Duct seal shall be applied at all conduit entrances after cable installation.
 5. A watertight seal shall be applied along the inside and outside edges of the cabinet where it abuts to the concrete pad and around the secondary service enclosure where it abuts to the cabinet.
 6. 4" is nominal dimension. 2"x4" forms are acceptable except where otherwise noted or directed (exposed concrete surfaces shall be formed by other means for an acceptable finished appearance).
 7. HDPE conduit (orange in color) with a #10 AWG stranded copper locating cable and polypropylene pull rope sized per plan.
 8. PVC conduit elbows in concrete foundations shall be connected to HDPE conduit with PVC pipe nipple and approved PVC to HDPE couplings. All PVC pipe nipples, elbows and couplings shall be considered subsidiary to the traffic signal controller pad.
 9. Contractor to install concrete anchors and bolts per manufacturer's recommendation (bolt spacing varies per manufacture) to anchor secondary service enclosure and signal cabinet to concrete foundation. Also anchor to signal cabinet with sheet metal screws.
 10. Contractor shall install a 36" radius, large sweep 90° elbow at each end of power lead-in conduit. Material shall be Schedule 40 PVC (gray) or SDR 13.5 HDPE (black with red stripe).
 11. Contractor shall install 180° PVC conduit sweeps from secondary service pedestal sweeping up into the controller cabinet.
 12. Contractor to provide ground rod(s) as required for maximum of 25 ohms resistance to ground. Contractor shall be required to test with the inspector present.
 13. Cabinet shall be oriented such that when the technician is facing the front of the cabinet, he can look over the top and see the intersection ahead of them.
 14. All reinforcing steel shall be ASTM A615 GR40.
 15. All concrete surfaces shall be brushed and sealed with curing compound.
 16. All concrete used in this work shall meet the requirements of the City of Overland Park Municipal Code and shall be KCMMB4K concrete (f'c=4,000 psi) with a 4" slump.

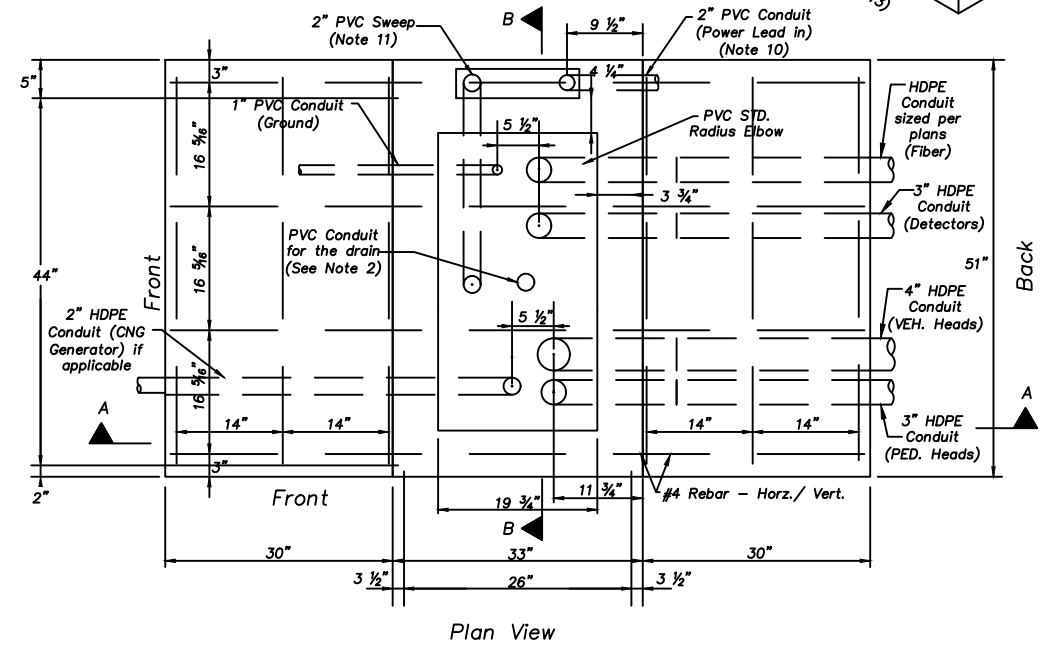


Plan View

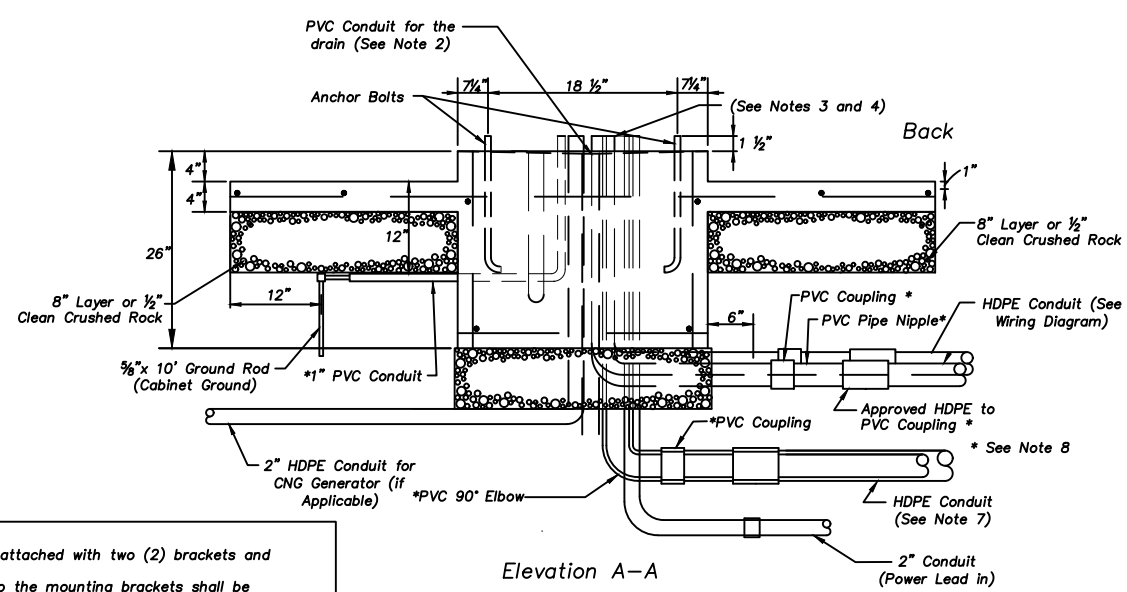


Elevation A-A

Controller Cabinet Pad Details (Double Wide)

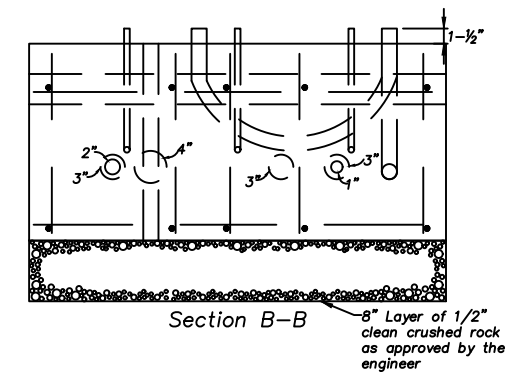

Section B-B

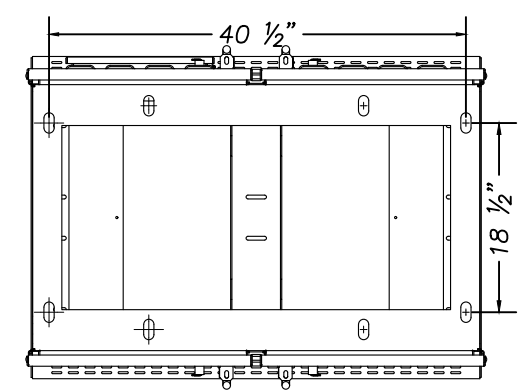


Signal Controller Foundation Bolt Pattern

- Sign Mounting Notes:**
1. Signs on side of pole shall be attached with two (2) brackets and stainless steel bands.
 2. Holes in sign for attachment to the mounting brackets shall be offset a minimum of 2" from the edge of sign.
 3. Holes in sign shall be located such that the sign is plumb and level.
 4. This detail is not intended for R10 series signs attached to signal mast arms.
 5. When only one R10-3e sign is used on the pedestal pole, mount with the bolts centered on the sign.

V/G	BY
2021 Standard Details	
1 09/01/2021	DATE
2	NO.
3	REVISIONS


September 1, 2021 - 1:38 PM
K:\Details_SpecialDetail_Drawing\Traffic\SD Index\In Progress\Current MASTER Sheets 2021 Traffic Signal Details - MASTER.dwg
JMiller

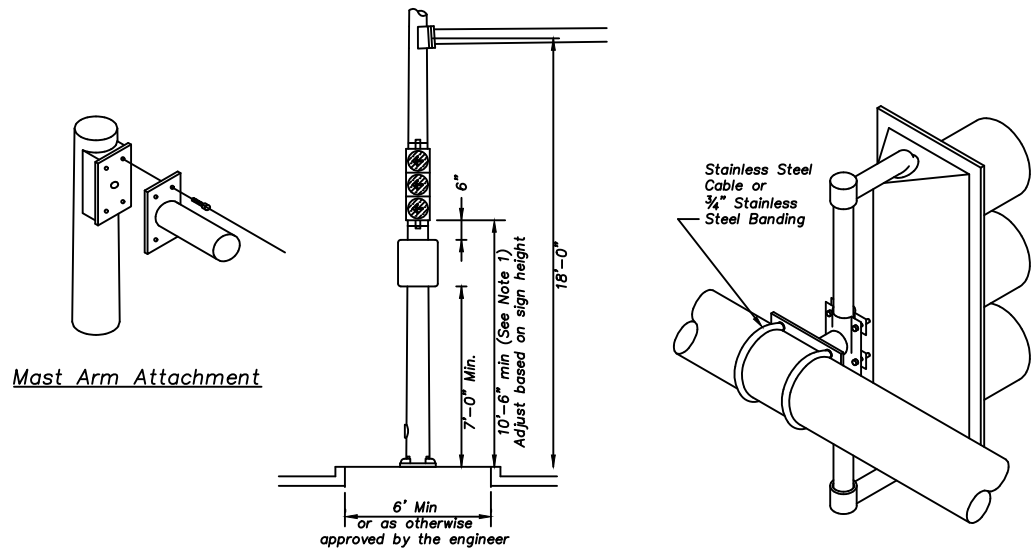

Median Mounted Steel or Steel Combination
Streetlighting & Signal Pole


Mast Arm Signal Mounting Bracket

- Note:
1. Mount vehicular signal head at 8'-6" if no traffic sign specified.

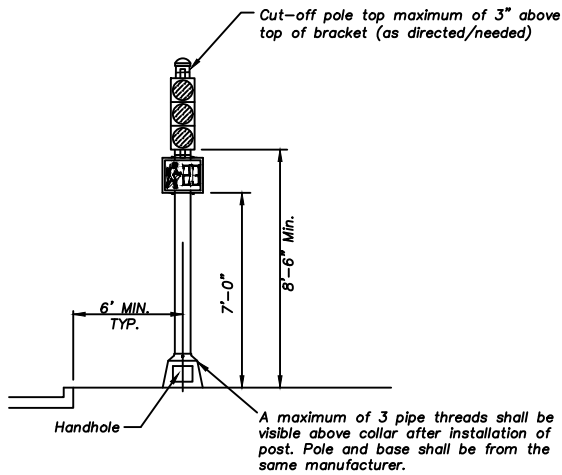


Aluminum Signal Pedestal Pole


- Notes:
1. Orient handhole toward the sidewalk opposite the direction of opposing traffic.

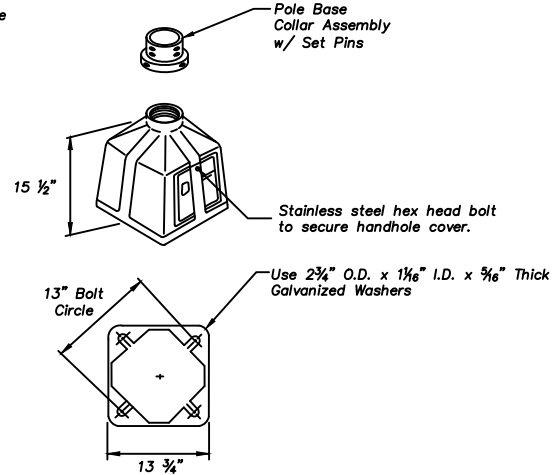

Pedestal Pole
Base Detail

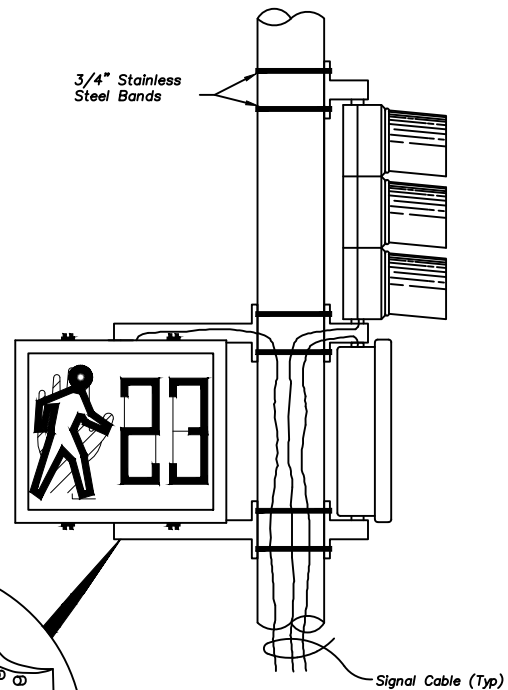


Pole Band and Bracket
Mounting Detail

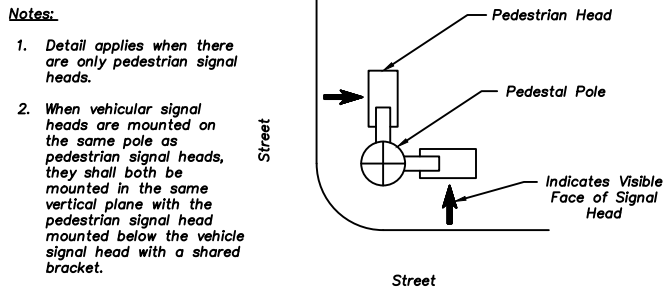


Pedestrian Signal Head Orientation Detail


- Notes:
- Handhole cover, and mast arm & pole caps shall be shipped with the poles and be installed prior to final acceptance of the traffic signal system.
 - Install corresponding colors of signal heads at the same elevation - adjust for mast arm rake.
 - Each vehicular signal head (mast arm and/or pole mounted) shall be covered with a black or orange (unless otherwise noted) signal head cover during construction until the system is made operational.
 - The side of pole signal head mounting heights shown are to the bottom of the housing and not to the brackets.
 - All R10-11b, R10-17a, R10-FYA, or R3-4 signs to be mounted on the traffic signal poles or mast arms shall be provided and installed by the contractor. All signs shall conform to the Manual on Uniform Traffic Control Devices, latest edition for color, size, letter and legend. (See sign details and specifications)
 - Contractor to provide and install overhead street name sign. (See mounting detail and overhead street name sign detail.)
 - Vehicle advance radar detection unit shall be mounted as close to the center of the through traffic lane(s) per manufacturer's recommendation.
 - Emergency Vehicle Pre-emption (EVP) detector shall be mounted near the center of the through traffic lane(s) to the right or left of the radar detection unit.
 - All hardware not specifically shown in the details shall be in accordance with manufacturer's recommendation. Any deviations shall be submitted for approval.
 - Minor adjustments in the location of traffic signal poles or signal controller cabinet should be made in the field during construction in order to maintain a minimum 4'-0" clearance from the centerline of any fire hydrant to the face of pole or cabinet.
 - All traffic signal heads shall have two 1/4" diameter drain holes drilled in the bottom housing.
 - Address Stencil shall have 2" high black EC film letters and numerals applied to a one piece Type XI retro-reflective sheeting with a black EC film border by the contractor. Apply on 'street side' of pole facing the referenced street address.

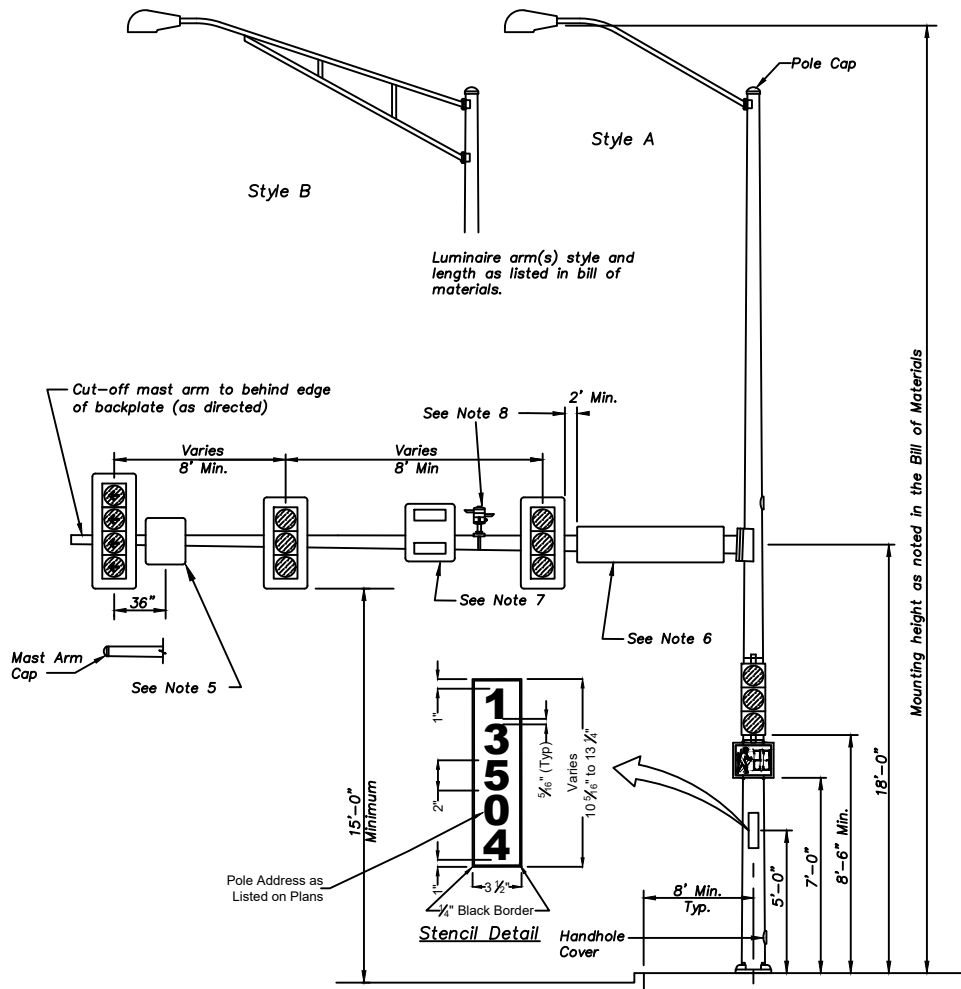

Steel Combination Streetlighting & Signal Pole

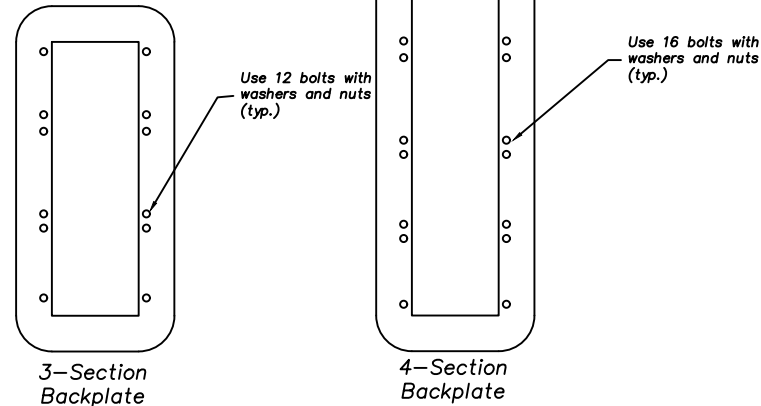

Traffic Signal Backplates

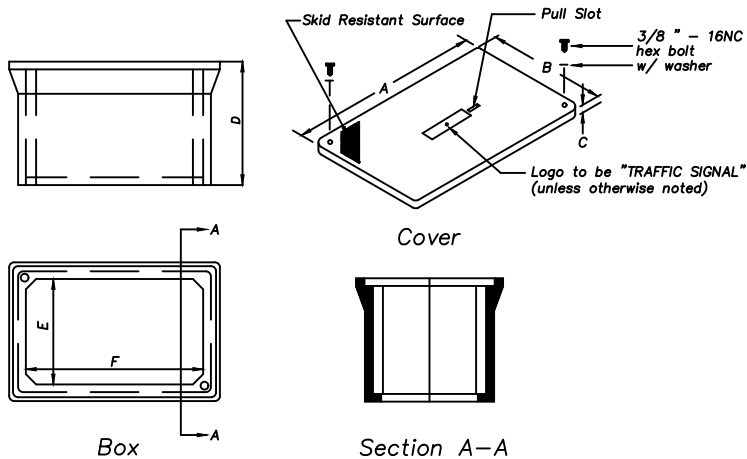


Type	Approximate Dimension (Inches)					
	A	B	C	D	E	F
1 - Junction	12 7/8"	12 7/8"	3/4"	12 3/4"	9 3/4"-10 1/2"	9 3/4"-10 1/2"
2 - Junction	18"-18 1/2"	11 1/4"-11 1/2"	2"	12"	9 1/2"-10 1/4"	16 1/2"-17 1/4"
1 - Service	35 5/8"	24"	3"	24"	22 1/4"	33 7/8"
2 - Service (Note 2)	47 5/8"	30 1/8"	3"	24"	28 1/8"	45 5/8"

Fiberglass Reinforced Polymer Concrete Junction & Service Box Details

Box Notes:


1. Attach 1c #10 THHN/THWN stranded copper system ground wire to 5/8" x 8'-0" ground rod in service box. Multiple #10 ground cables introduced at signal poles shall be terminated at ground rod with an additional clamp.
2. The Type 2 Service Box shall have a two-piece overlapping cover.
3. Cover label shall be applied with epoxy.

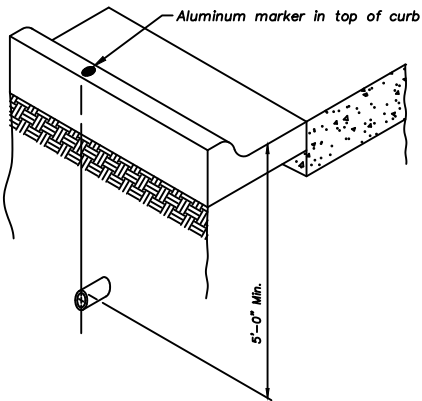


Conduit Marking Detail Notes

1. Conduit under all roadway surfaces shall be placed a minimum of 5'-0" below the top of pavement and shall extend to signal appurtenances as indicated in the plans. Refer to the City of Overland Park Horizontal Directional Drilling Guidelines Handbook, latest edition for further requirements for conduit installation under roadway surfaces. The conduit shall be installed to drain, and all ends shall be capped if not being used. An aluminum marker shall be placed in the top of the curb, or outside edge of shoulder, directly over the conduit with epoxy. Markers shall be embedded such that the top is flush. Aluminum markers will be furnished by the City of Overland Park.
2. The contractor shall notify the City of Overland Park, Department of Public Works, Traffic Services Division at 895-6000 for inspection of the conduit installation by the City Inspector. At least 24 hours notice shall be provided. The conduit shall not be covered so as to ensure proper depth, correct conduit material, and proper conduit end treatment as described above.

Conduit Marking Detail

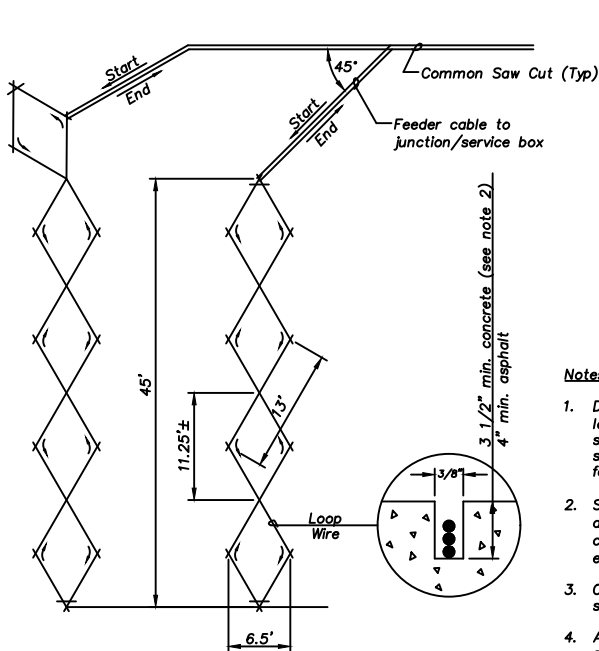


Multi Diamond Loops

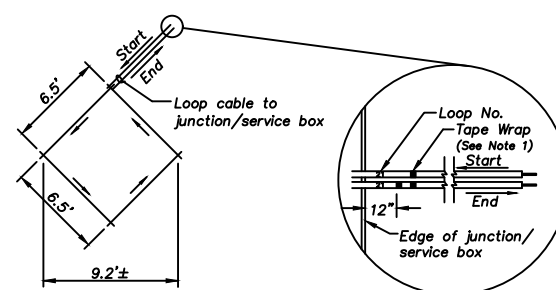


1 - Diamond Loop

Notes:


1. Diamond presence and advance loops to be one continuous wire placed in three turns. All loops to be wound in same direction, with start and end clearly marked at junction box / service box. Each loop shall be identified with the loop number as shown on the plans, the start identified with one wrap of tape and the end identified with two wraps of tape. Three feet of excess cable shall be coiled in the box.
2. Slot in pavement for loops to be cut 3/8" wide and 4" deep minimum in asphalt or 3 1/2" deep minimum in concrete (unless otherwise directed by the engineer in charge of construction). Fill slots with an approved asphalt sealer (asphalt pavement), or an approved elastic epoxy sealant (concrete pavement) to within 1/8" of pavement surface.
3. Other than the splice from the 1c #14 loop cable to the shielded detector home-run cable, wire shall be of continuous run with no splices. All connections to be watertight.
4. All leads for individual loops to be kept in common saw cut and loop wire between the loop and the feeder cable connection shall be twisted 3 turns per foot.
5. All loops shall be wet cut with equipment approved by the engineer into the asphalt base course prior to the final lift of asphalt surface course, if applicable.
6. Sealants shall be installed by injector wand, cartridge guns or air pump method. Hot pour sealants are allowed only if applied neatly without overfill, drips or runs.
7. Loop sealant in concrete pavements shall be gray in color.
8. All loops shall be connected in series.
9. Five diamond loops shall be used for left turn lanes with permissive or protected/permissive phasing. Four diamond loops shall be used for through lanes or left turn lanes with protected only left turns.
10. See Field Input Terminal Assembly for wiring diagrams and loop assignments.

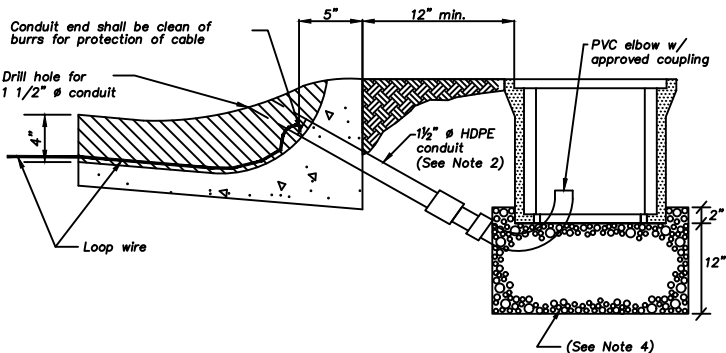

Junction Box Detail (Type 'A' Curb)

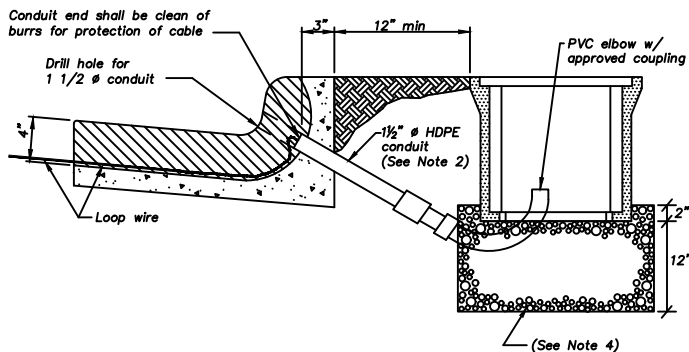


Junction Box Detail (Type 'B' or 'E' Curb)

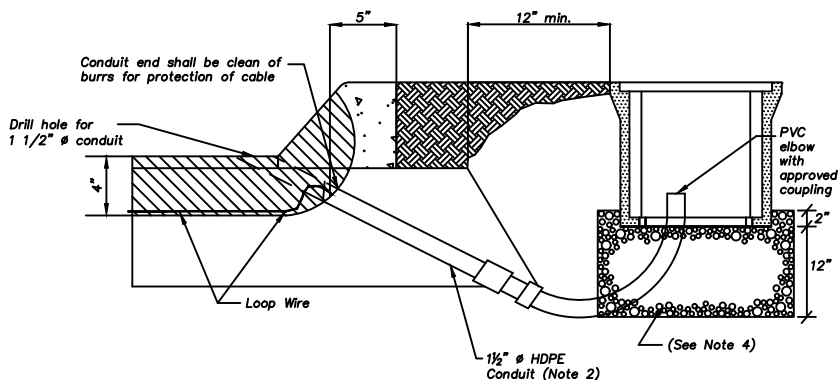


Junction Box Detail (Type 'D' Curb)

Notes:

1. Saw cuts and conduit entrance to be sealed with a pliable non-hardening duct sealant.
2. PVC conduit may be used continuous from curb to junction box if distance from back of curb to center of junction box is less than 10 feet.
3. Crushed rock shall be extended toward curb to underdrain if present.
4. A layer of 1/2" clean, crushed rock, as approved by the engineer, shall be constructed below all boxes for drainage purposes. See details for thickness.

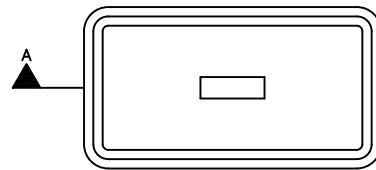

Service Box Detail (Plan)

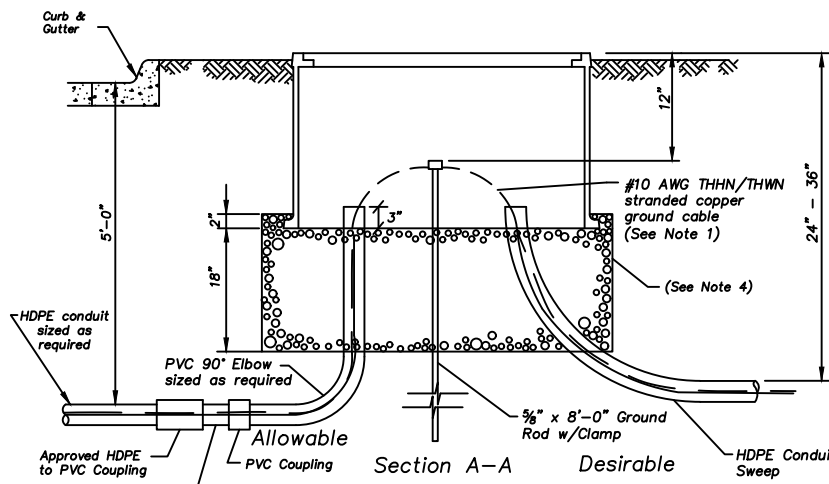

Service Box Detail



The mast arm traffic structures shown on this drawing have been designed in accordance with the loading and the allowable stress requirements of the 2013 AASHTO "Standards Specifications for Structural Supports for Highway Signs, Luminaires and Traffic Signals," Sixth Edition, LTS-6. The wind loads were calculated from a basic wind velocity of 90 MPH with a recurrence interval of 25 years, and a fatigue category of 2. The fatigue loads were calculated on the requirements of Section 11 of the Code, and the following design conditions.


- Structures are designed to resist natural wind gusts based on the yearly mean wind velocity of 11.2 MPH.
- Structures are not designed to resist galloping-induced cyclic loads.
- Truck-induced gust loads are excluded per the requirements of the code.

TYPICAL POST LOADING


The diagram illustrates a typical mast arm traffic structure. The mast arm is labeled "MAST ARM" and has a maximum height of 18' MAX. The structure is supported by a post with a diameter of 12" MAX. The post is labeled "J" at the top and "I" at the base. The mast arm is labeled "C" at the top and "D" at the base. The structure is shown with a 34' MAX. span and a 40' MAX. span. The diagram also shows a detail of the post and mast arm connection, with dimensions 1' and 3' indicated. The detail shows a post labeled "H" and "A" and a mast arm labeled "E".

[illegible]


September 1, 2021 - 1:36 PM
R:\Details - Signal\Drawings\Traffic\Signal Details - MASTER.dwg
J:\eller

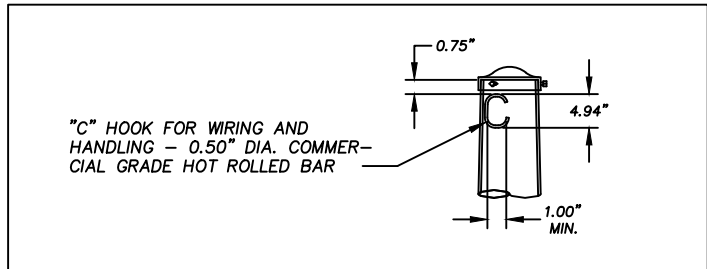

DETAIL 1 POLE TOP

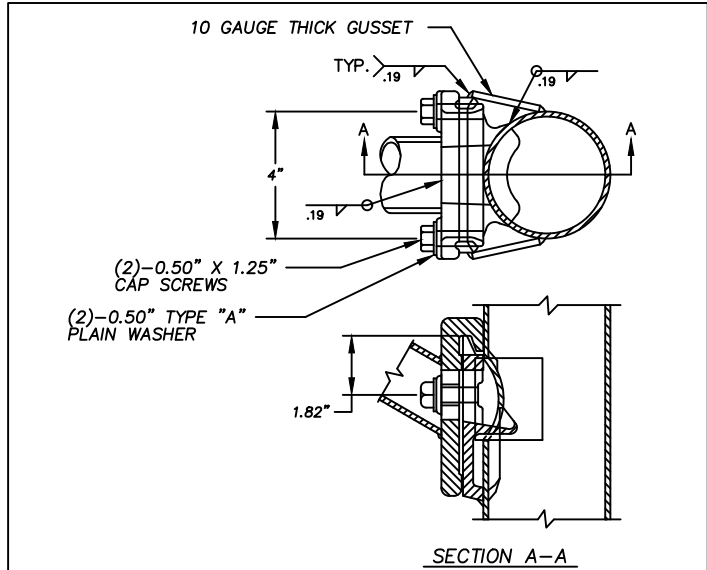


DETAIL 2 LUMINAIRE ARM ATTACHMENT

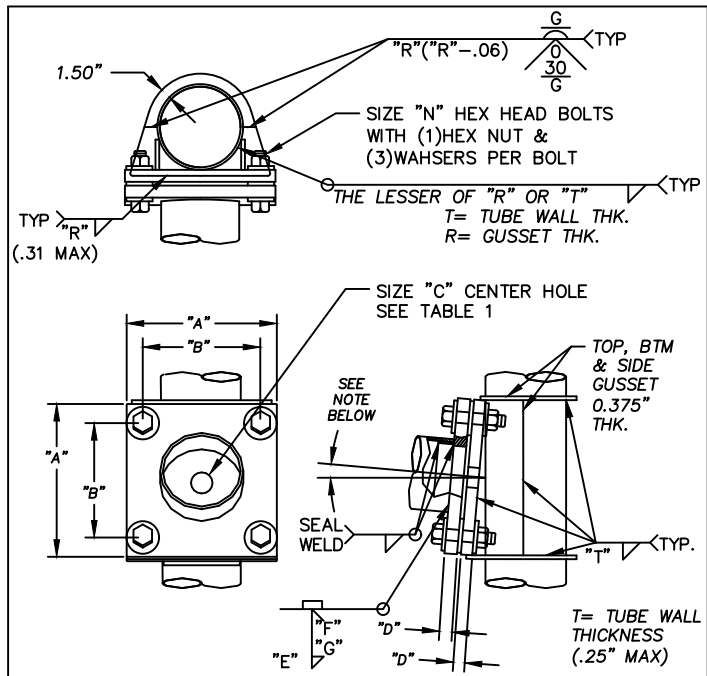

RISE NOTE:
RISE SHALL BE BUILT IN THE MOUNTING PLATE ATTACHED TO THE POLE. RISE IN MTG PLATES MAY VARY DEPENDED UPON POLE SIZE AND MAST ARM LOADING.



ARM SHAFT WALL THK.	ARM-TO-PLATE WELD "E"	BEVEL "F" X "G"
ALL	(ARM THK. + .25") X ARM THK.	.19" X 30°

DETAIL 3 SIGNAL ARM ATTACHMENT

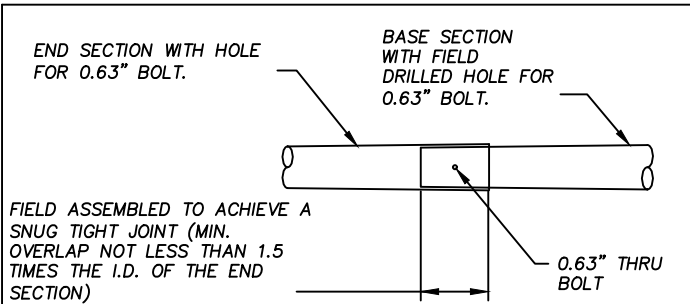


SPAN (FT)	BASE SECTION		END SECTION		
	LENGTH (FT)	GAUGE/THK. (IN)	BASE DIA. (IN)	LENGTH (FT)	GAUGE/THK. (IN)
40.00	19.29	0.313	11.00	23.15	7
42.00	19.29	0.313	11.00	25.15	7
44.00	19.29	0.313	11.00	27.15	7
46.00	26.43	0.313	11.00	22.01	7
48.00	26.43	0.313	11.00	24.01	7
50.00	15.97	0.313	13.00	36.72	7
52.00	19.42	0.375	12.00	35.15	7
54.00	19.54	0.375	13.00	37.15	7
56.00	19.54	0.375	13.00	39.15	7
58.00	23.11	0.375	13.00	37.58	7
60.00	19.75	0.375	14.00	43.07	0.188
62.00	19.83	0.375	14.50	45.05	0.188
64.00	19.92	0.375	15.00	47.02	0.188
66.00	27.00	0.375	14.50	41.88	0.188
68.00	27.08	0.375	15.50	43.93	0.188
70.00	27.08	0.375	15.50	45.93	0.188


DETAIL 4 40'-70' SIGNAL ARM SLIP JOINT

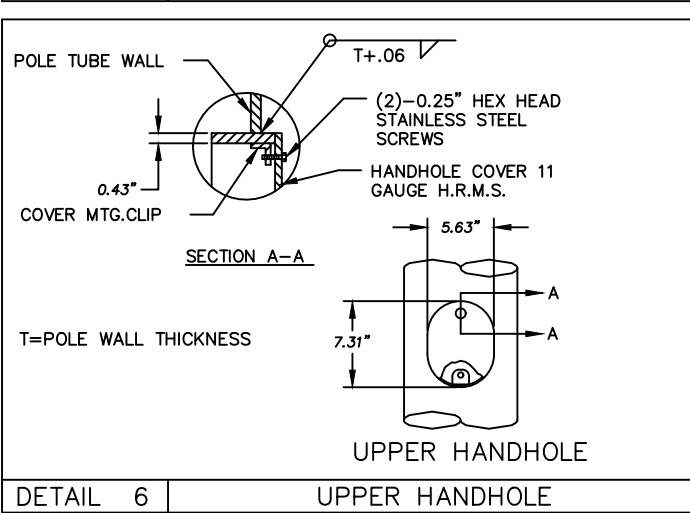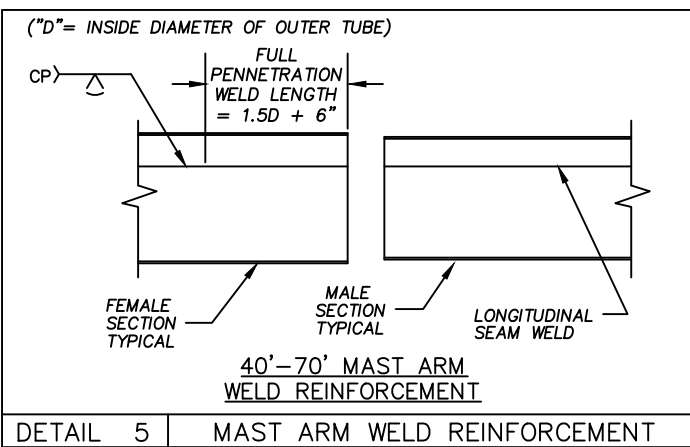


DETAIL 6 UPPER HANDHOLE

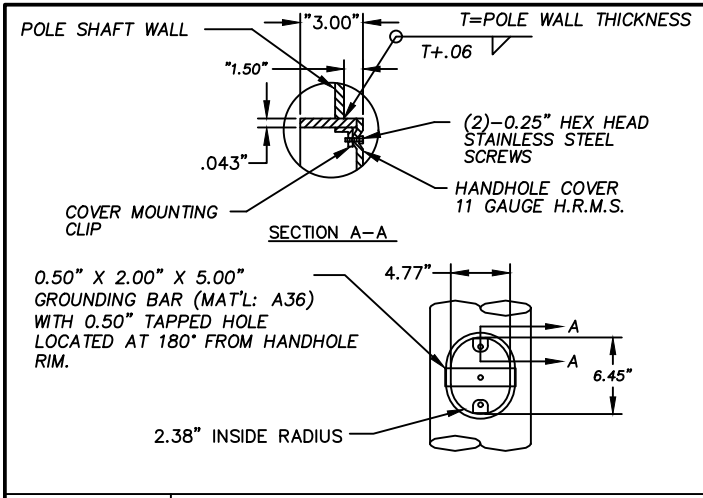

DETAIL 7 LOWER HANDHOLE

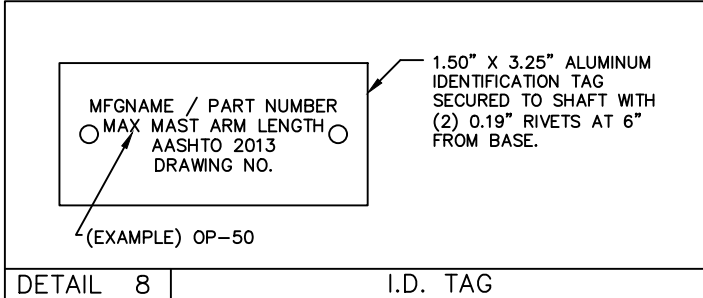

DETAIL 8 I.D. TAG

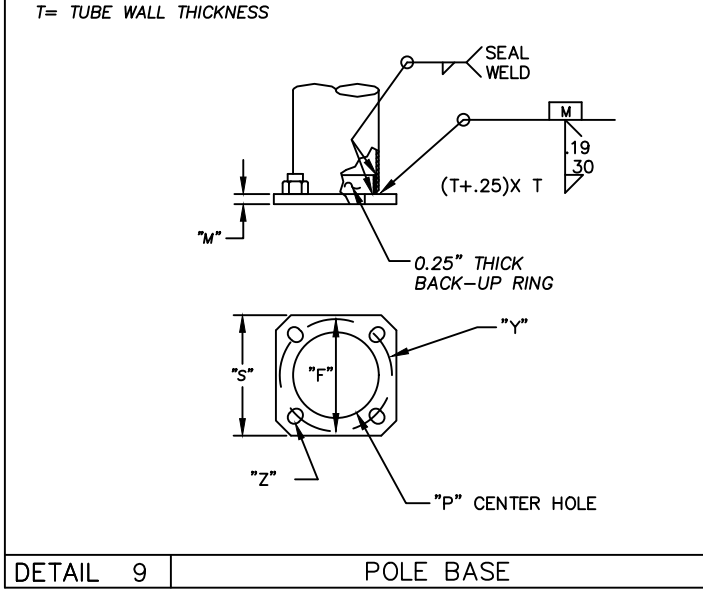

DETAIL 9 POLE BASE




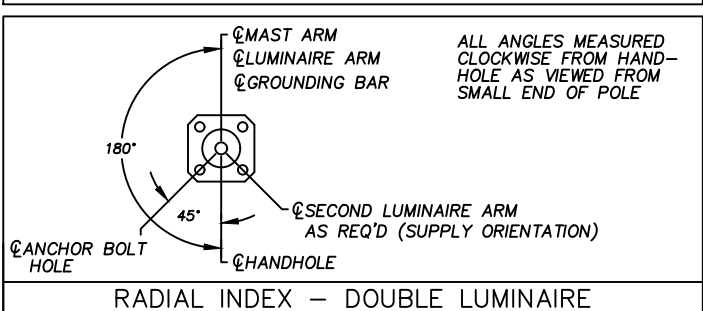



TABLE 3: MATERIAL DATA		
COMPONENT	ASTM DESIGNATION	MIN. YIELD (KSI)
ALL TAPERED SHAFTS	A595 GR.A OR A572	55
BASE PLATE	A572 GR. 50	50
SIMPLEX PLATE	A572 GR.50	50
LUM ARM ATTACHMENT	A27 GR. 65-35 OR A36	35
LUMINAIRE ARM - 2" SCHEDULE 40 PIPE	ASTM A501, A513, A618 OR A500 GR. B	36
LUMINAIRE CONN. BOLTS	SAE GR.5	--
ANCHOR BOLTS	F1554 GR.55	55
ARM CONNECTING HARDWARE	A325	--
GALVANIZING-HARDWARE	HOT DIP ZINC	--

FINISH DATA	
STANDARD FINISH	OPTIONAL FINISH
SYSTEM: GALVANIZED (GV)	SYSTEM: FINISH PAINT/GALVANIZED (FPGV)
BASE COAT: HOT-DIP GALV. TO ASTM A123	BASE COAT: HOT-DIP GALVANIZED TO ASTM A123
PRIME COAT: NONE	PRIME COAT: HIGH BUILD EPOXY POWDER
FINISH COAT: NONE	FINISH COAT: TGIC POLYESTER POWDER
COLOR: NONE	COLOR: TBD
SPEC: F-1	SPEC: TBD

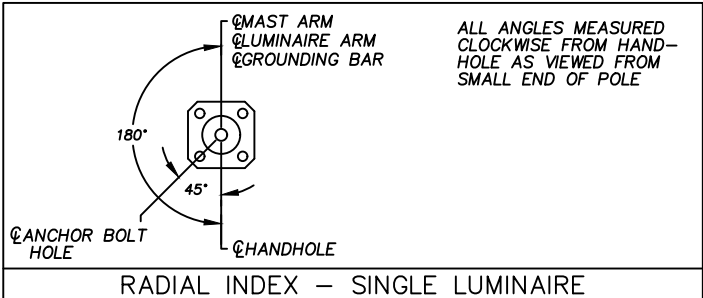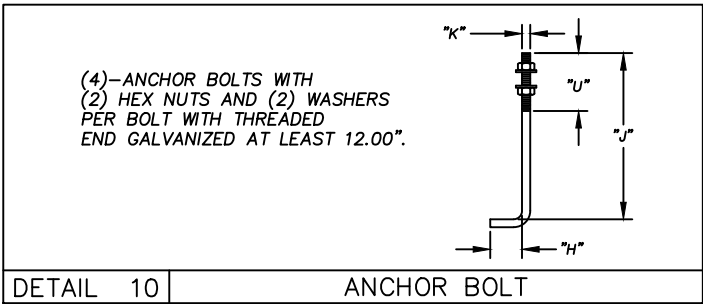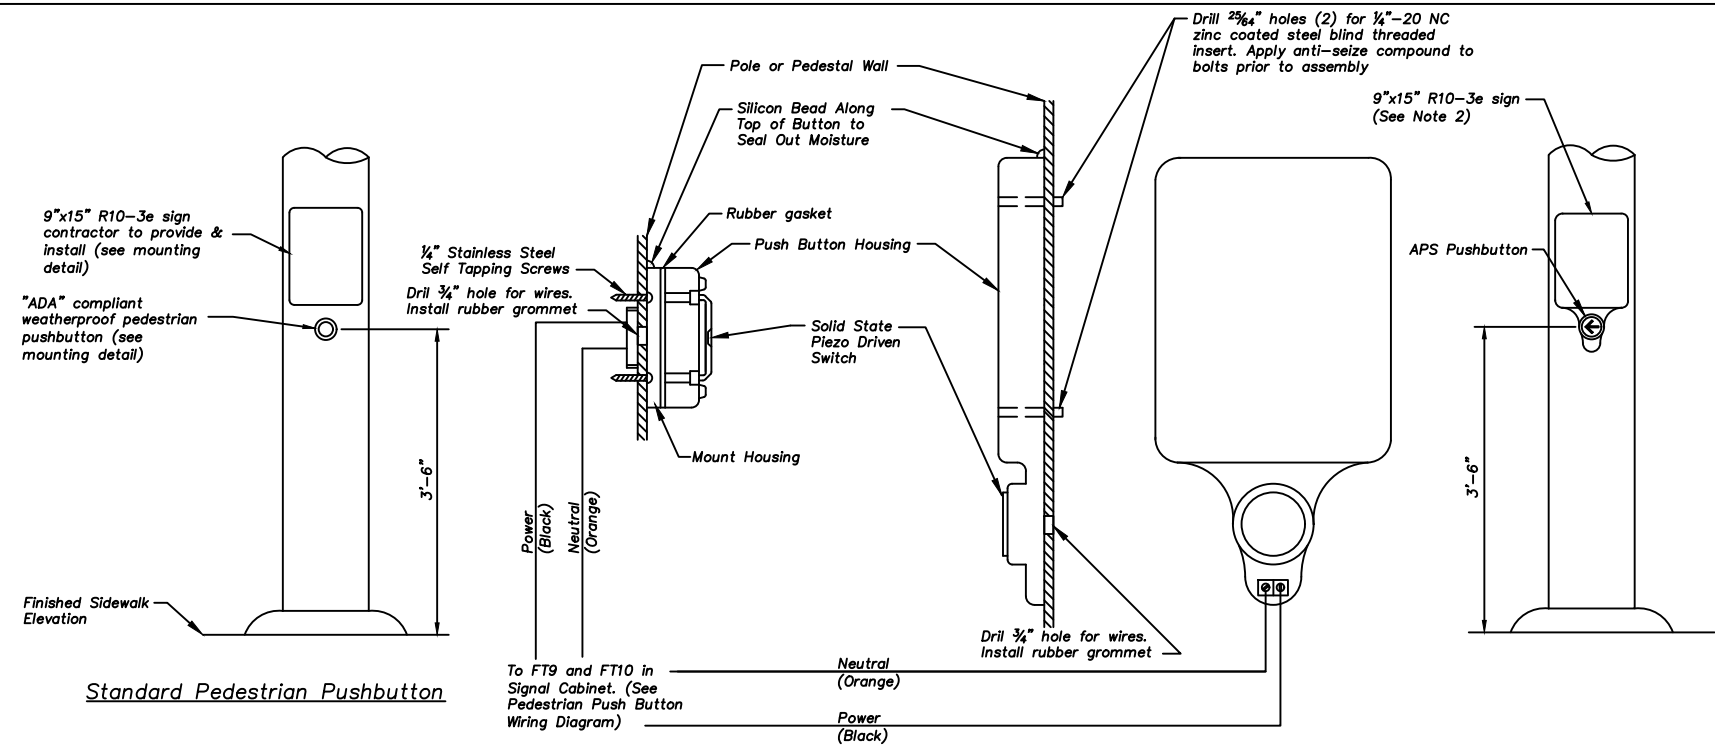


Notes:

1. Placement and orientation of the pushbutton station is critical. Mount the button so that the face is parallel with the associated crosswalk. Pedestrian pushbuttons to be located in the field by the engineer.
2. Maintain a 10" maximum reach from an accessible sidewalk to the pedestrian pushbutton. Mounting extension brackets are available if a 10" maximum reach from an accessible sidewalk cannot be achieved.
3. Include a 9"x15" R10-3e sign with each pedestrian pushbutton.

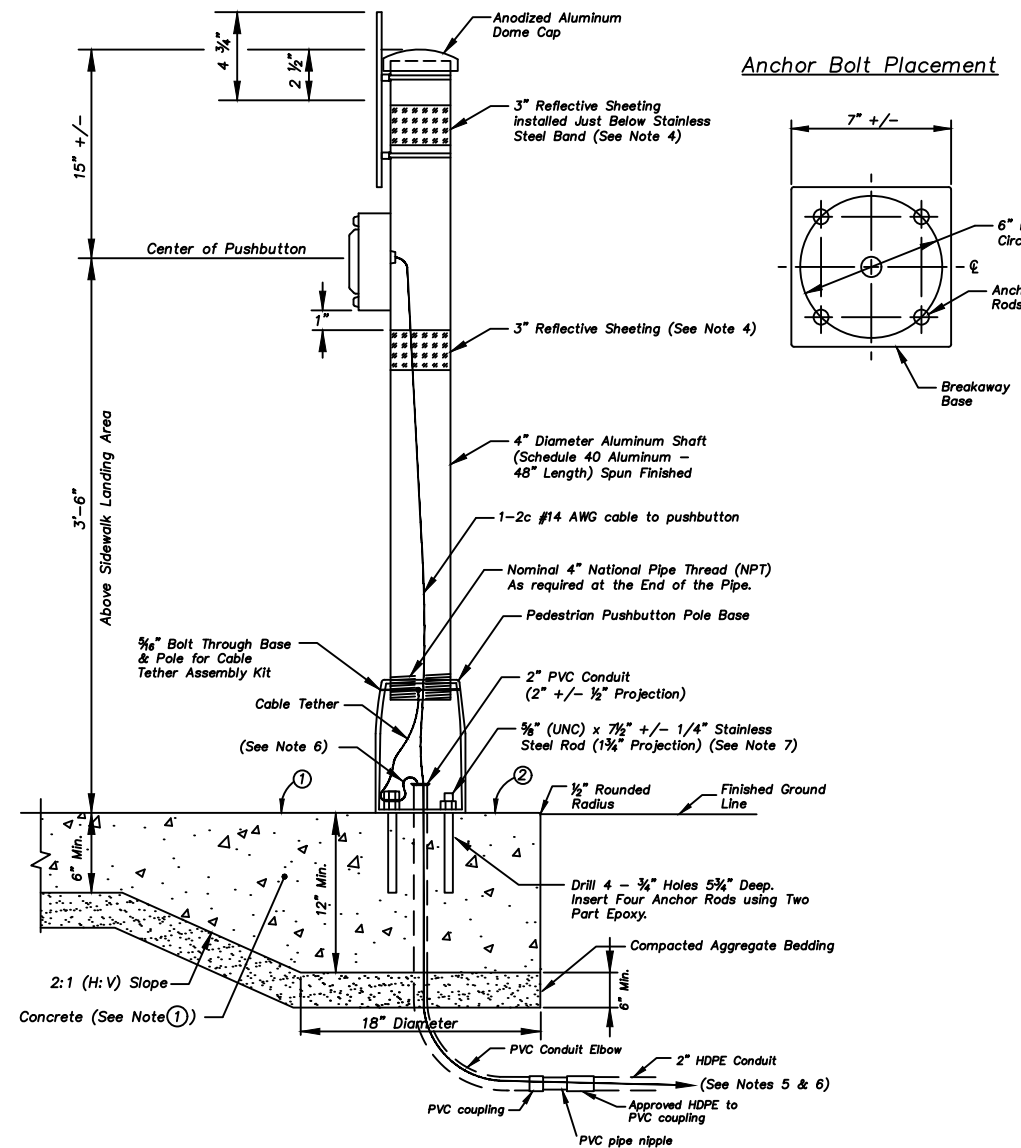


Monolithic Sidewalk Installation

Contractor must use this detail when the pushbutton is shown at the edge of walk. (See Note (2))




- Pushbutton Pole Notes:

1. Screw the pole shaft tightly into the base before mounting pushbutton unit to the shaft.
2. Grant access opening on the breakaway pedestal directly below the pushbutton station.
3. Plumb the push button station with stainless steel washers.
4. Install reflective sheeting on pole shaft above and below pushbutton. Use white at intersection corners and yellow in center medians.
5. Install 1-2c #14 AWG cable from the pedestrian pushbutton through the nearest service box and then to the base of the signal pole containing the associated pedestrian signal head. Splice the 7c #14 AWG for the corresponding signal head to the 1-2c #14AWG cable from the pedestrian pushbutton in the base of the signal pole.
6. Install a 1c #10 AWG stranded ground cable from anchor rods to the ground rod at the nearest service box.
7. Use one 8 1/2" stainless steel rod with a 3 1/2" bolt projection for the rod with the double nut and tether cable connection.

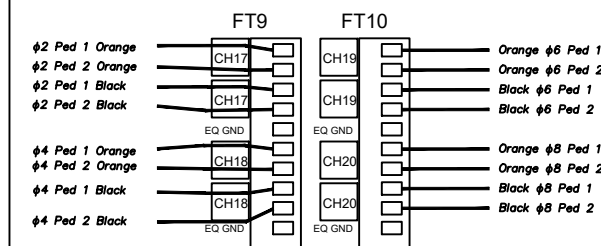


Pedestrian Pushbutton Wiring Diagram

FT9 and FT10 on the Field Input Terminal Assembly in the back of the signal cabinet







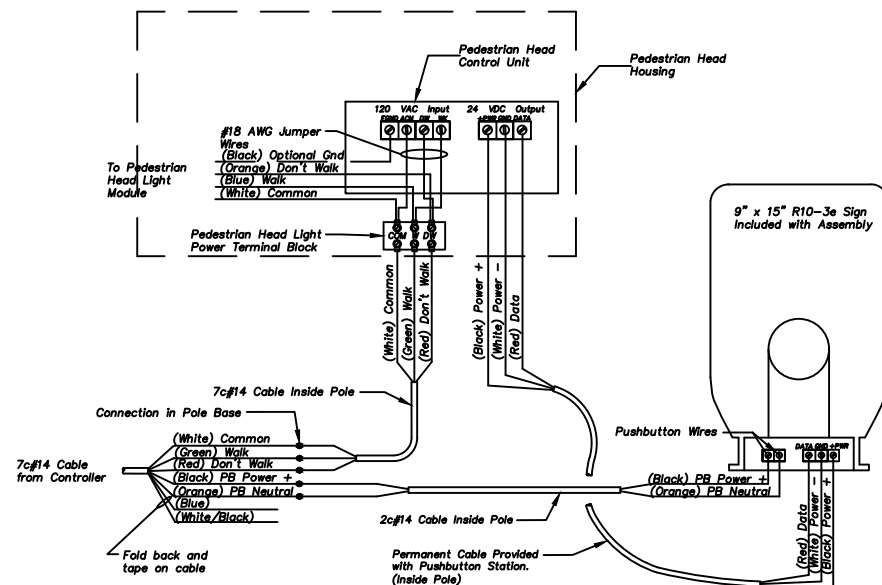






Audible Pedestrian Pushbutton Wiring Diagram

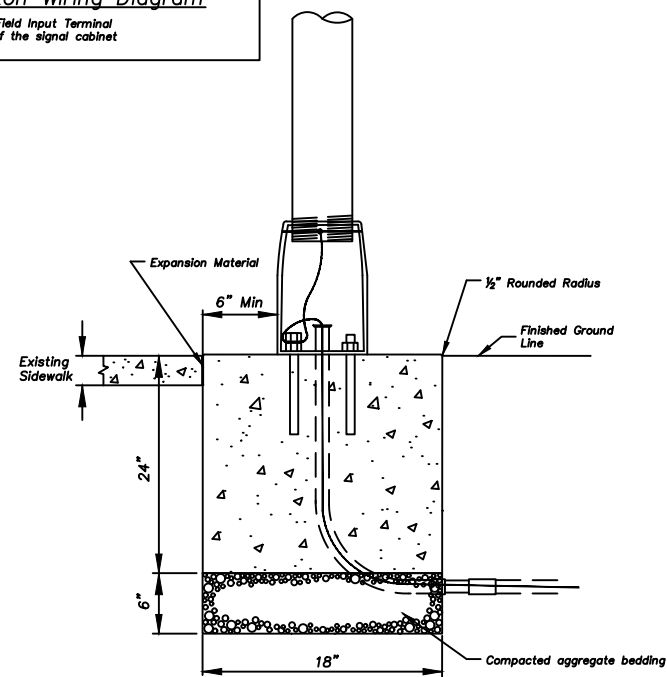



Stand Alone Installation

Pedestrian Push Button Pole Details

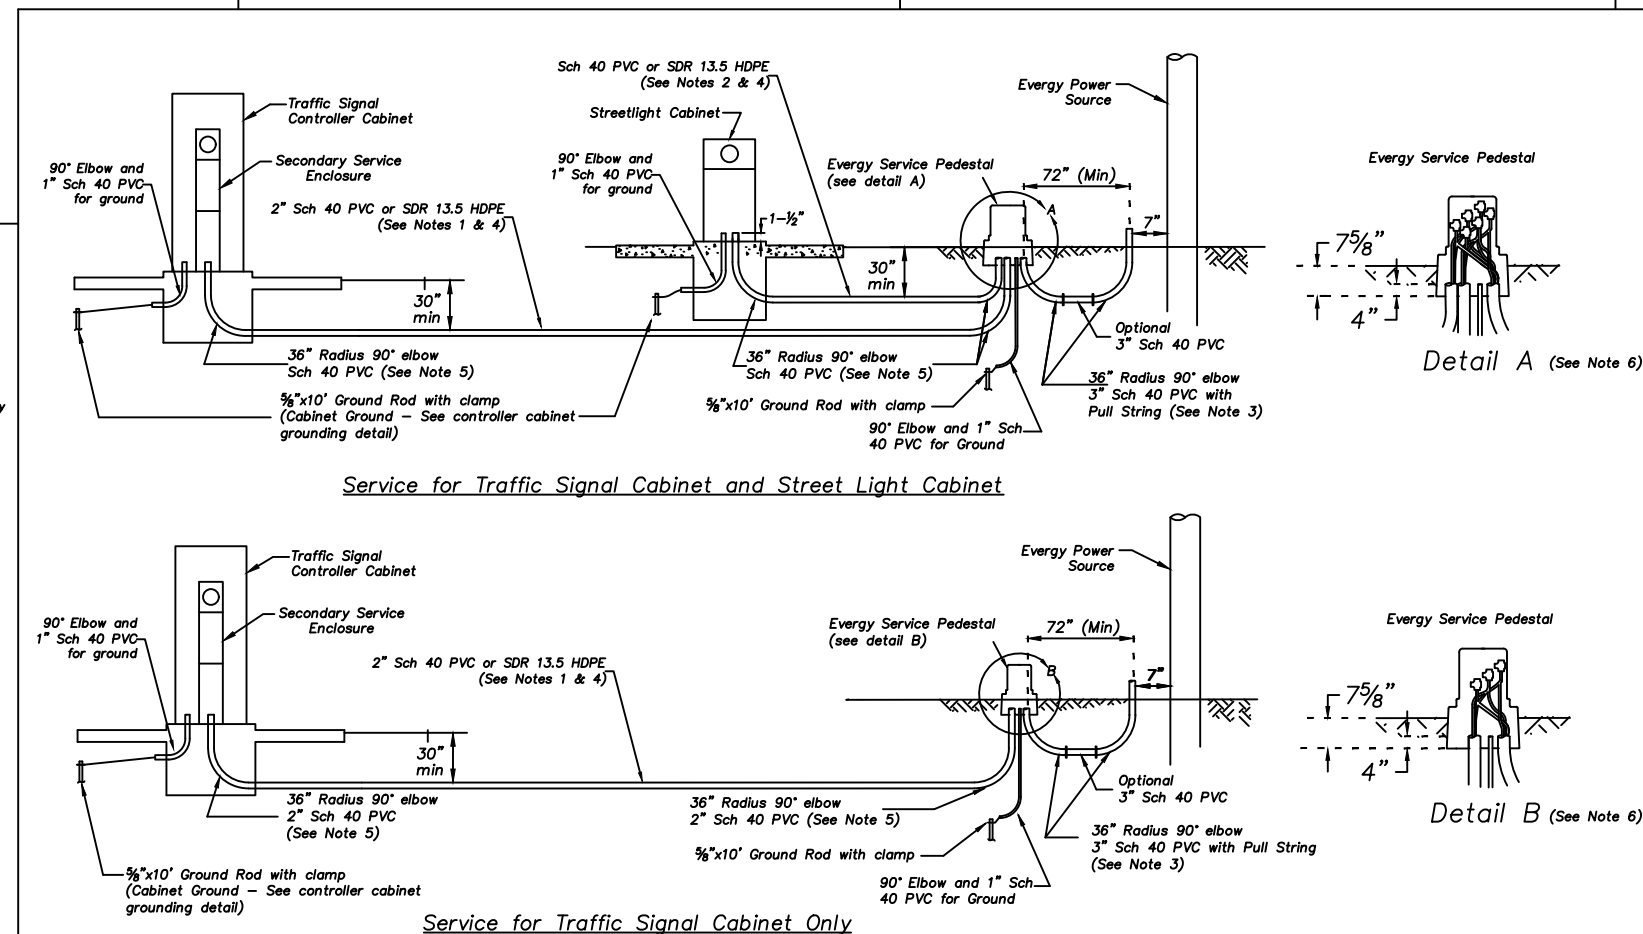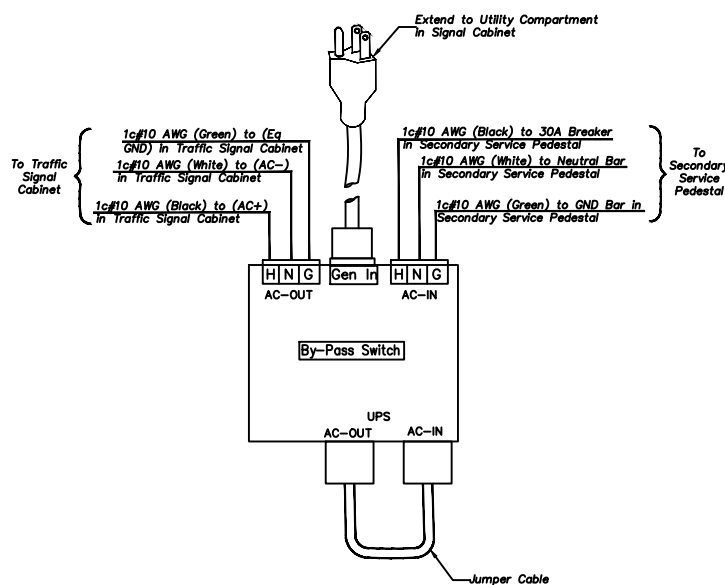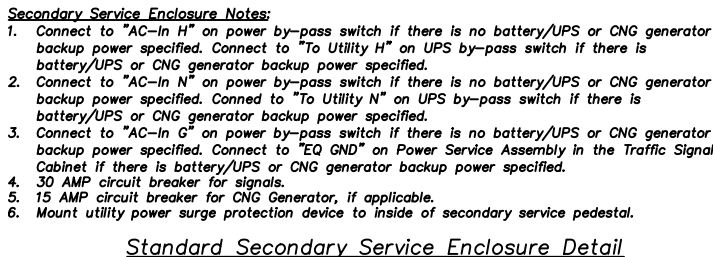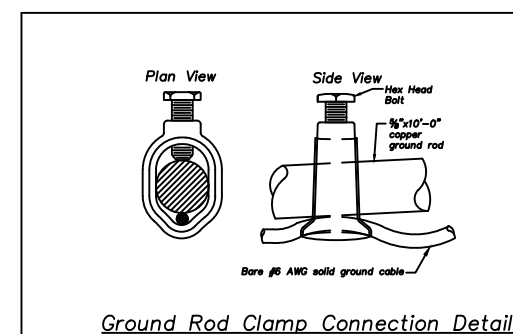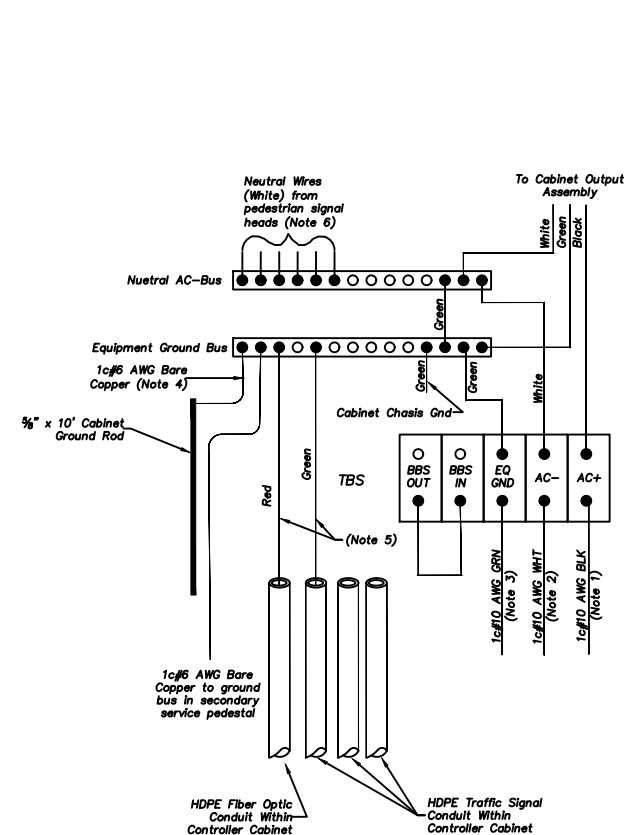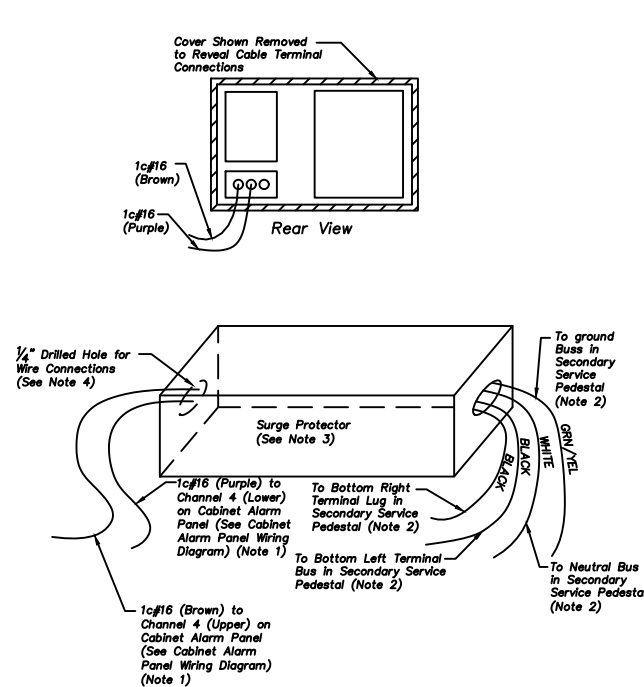
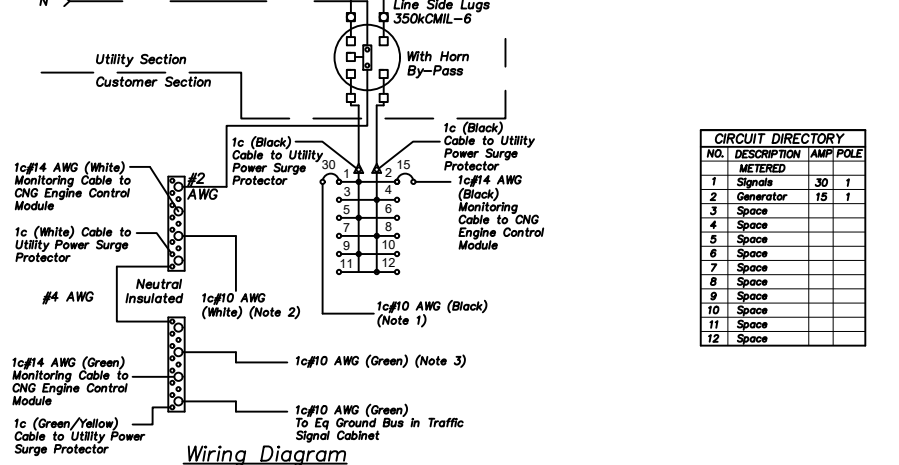


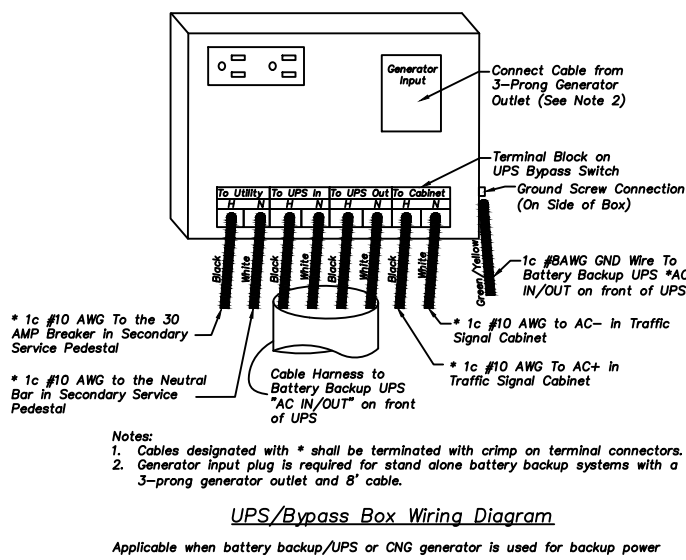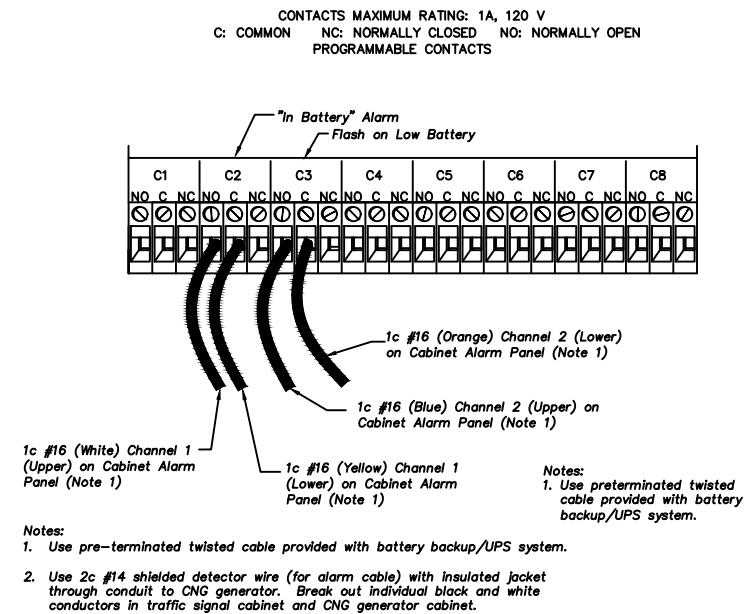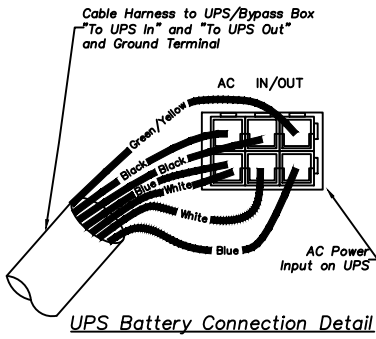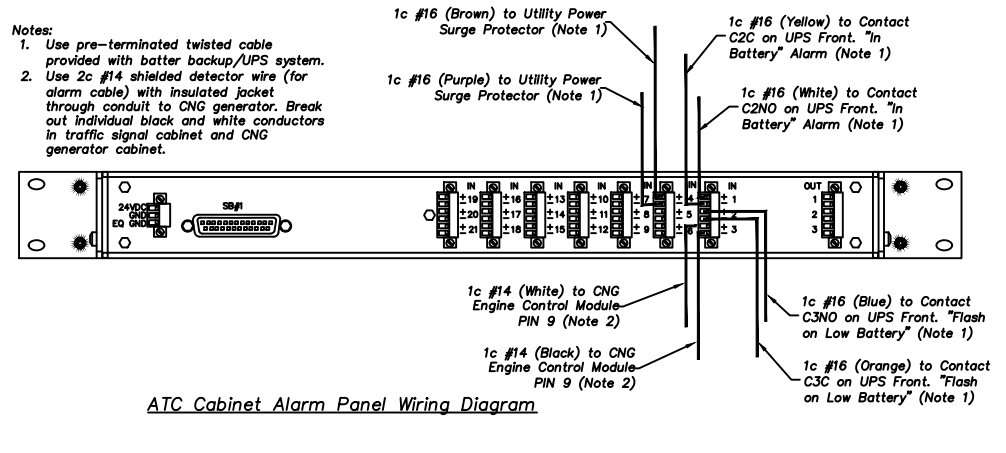

- Notes:
1. Gas company will provide and install the gas service line and the gas meter. A licensed contractor shall perform the tap to the gas main and the connection to the CNG generator regulator valve box.
 2. Contractor to provide and install the CNG generator per manufacturer's recommendations. The CNG generator shall have the following characteristics:
 - Independent outdoor enclosure with recessed locking doors
 - Designed to NFPA 37,54,58 standards
 - 48v dc output voltage
 - 96a max dc output current (rectified)
 - 10.5hp rated single ohv engine
 - 13.5 VDC ignition charger voltage
 - 6 amp max. ignition charger current
 - 2800-3600 RPM (max) variable speed
 - 80 cubic ft/hr, 1000 btu/ft
 - 0.5 - 2 PSI gas inlet pressure
 3. Contractor to provide and install 2" PVC conduit w/1-3c #2 AWG (power) & 1-3c #14 AWG (monitoring) and 1-2c #14 AWG (alarm) electrical cable from CNG generator to traffic signal cabinet.
 4. Contractor to install concrete foundation with anchor bolts to mount cabinet. See details. All soil shall be completely compacted prior to installing to avoid settlement.
 5. Allow 36" clearance to other cabinets to allow the front and rear doors to open completely.
 6. Shall be equipped with a cold weather starting kit for operational temperature range between -40°F and 122°F consisting of a battery heating mat and engine block heater.
 7. A 25+ year continuous vapor barrier must be used between the enclosure and pad to prevent moisture ingress. The vapor barrier material shall be a continuous duct seal band installed prior to setting the cabinet.
 8. Contractor shall ensure that the pad shear sensor is installed per manufacturer's recommendations with the magnetic sensor firmly glued to the concrete pad.

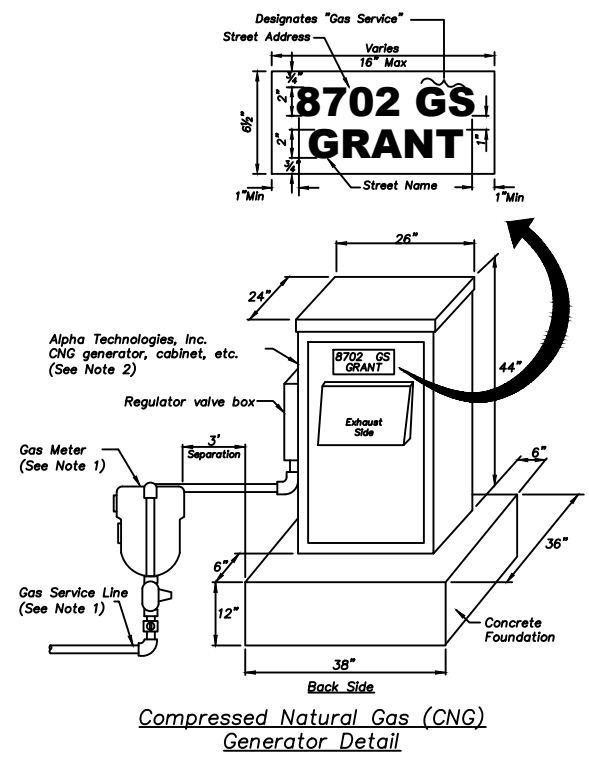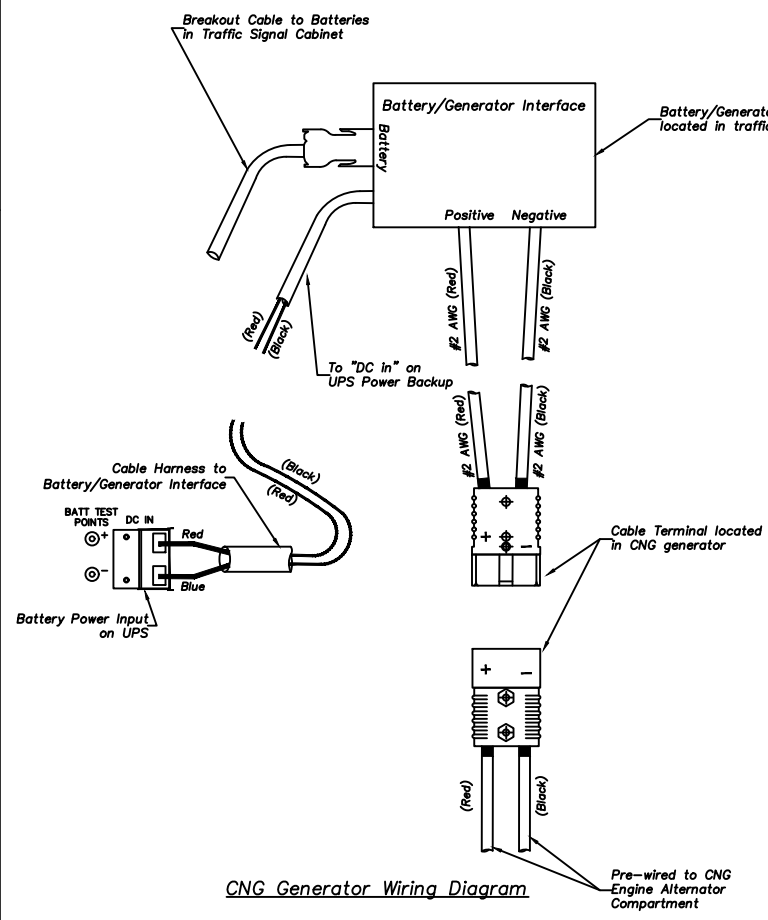


Stencil Detail Note:
2" high black EC film letters and numerals applied to a one piece Type XI retro-reflective sheeting with a black EC film border by the contractor. Apply on *street side* of cabinet facing the street referenced in the address.

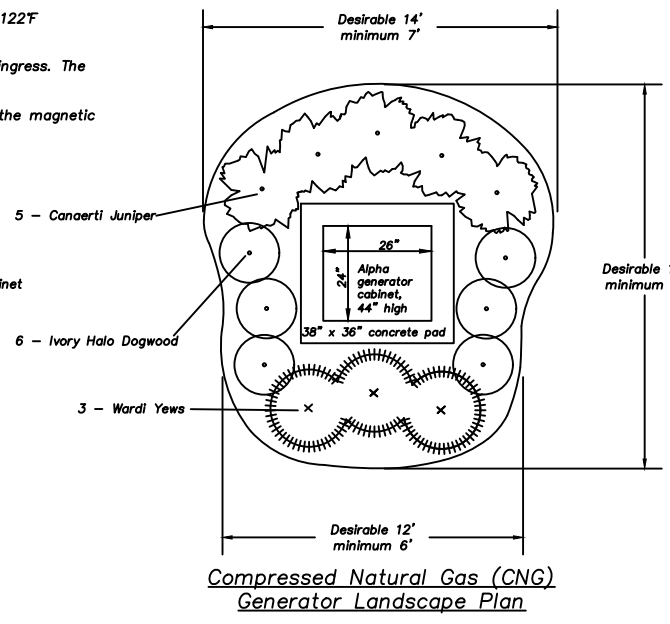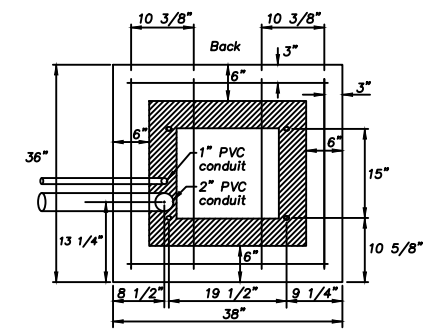


Min. Qty.	Desirable	Scientific Name	Common Name	Planting Size
3	5	Juniperus Virginiana "Canaerti"	Canaerti Juniper	5' B & B
4	6	Cornus Alba "Ballhalo"	Ivory Halo Dogwood	7 Gal.
3	3	Taxus x Media "Wardi"	Wardi Yew	24"-30" B & B


- Landscape Notes:
1. All landscape beds will consist of 3" shredded oak hardwood mulch.
 2. All disturbed areas outside of landscape beds will be sod and/or seed.
 3. Landscape fabric will be used to retard weed growth.
 4. A manicured "garden edge" will be constructed to a depth of 6" to retain mulch.
 5. Minimum and desirable quantities are based on overall size of landscaped area. Quantities should be based on "desirable" quantities unless otherwise determined by the engineer.

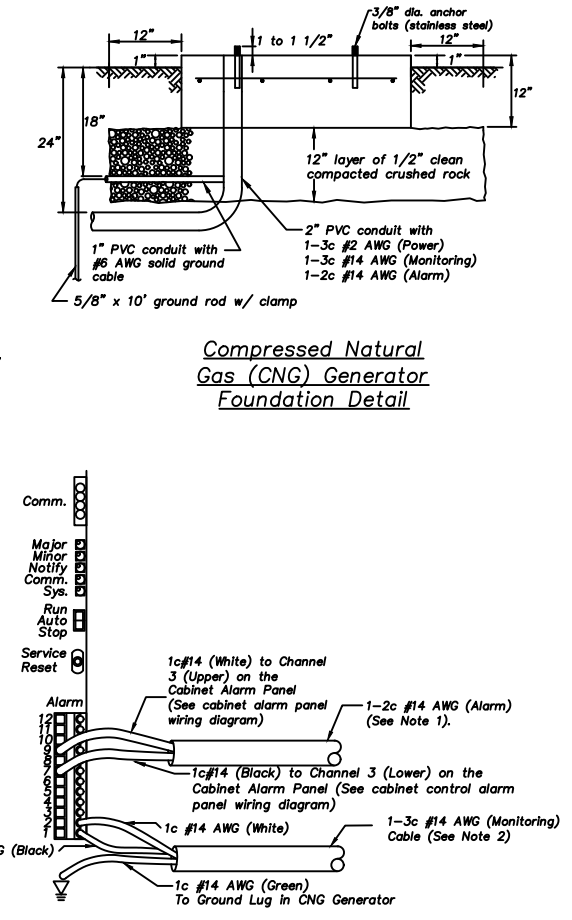



- Notes:
1. Use 1-2c #14 AWG shielded detector wire (for alarm cable) with insulated jacket through conduit to field terminal rear panel in signal cabinet. Break out individual black and white conductors in traffic signal cabinet and CNG generator.
 2. 1-3c #14 AWG (monitoring) cable with insulated jacket through conduit to secondary service pedestal cabinet. Break out individual conductors at each end.

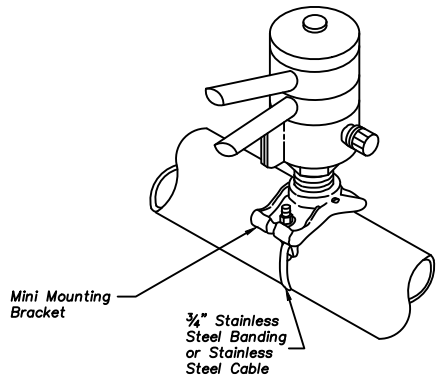

Bracket Attachment Detail

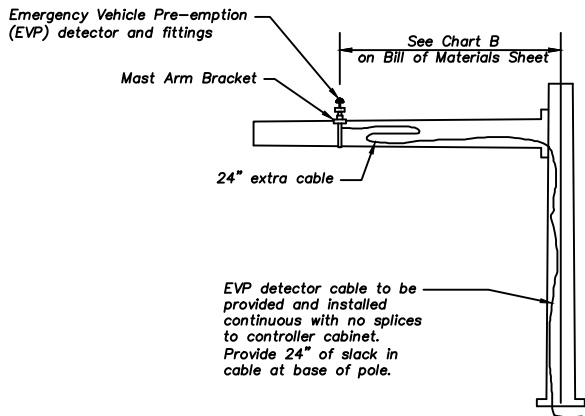


Emergency Vehicle Pre-Emption System Detail

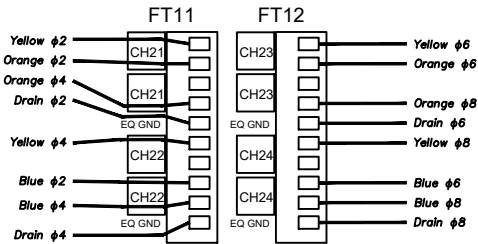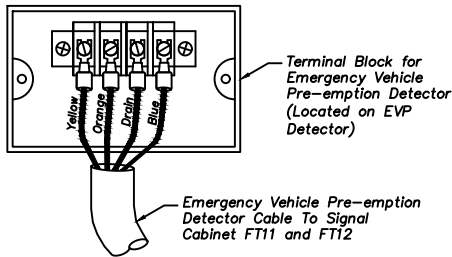


- Notes:
1. Cabling is shown for four pre-emption detectors.
 2. FT11 and FT12 are part of the Field Input Terminal Assembly in the signal cabinet

Emergency Vehicle Pre-Emption Detector Wiring Diagram

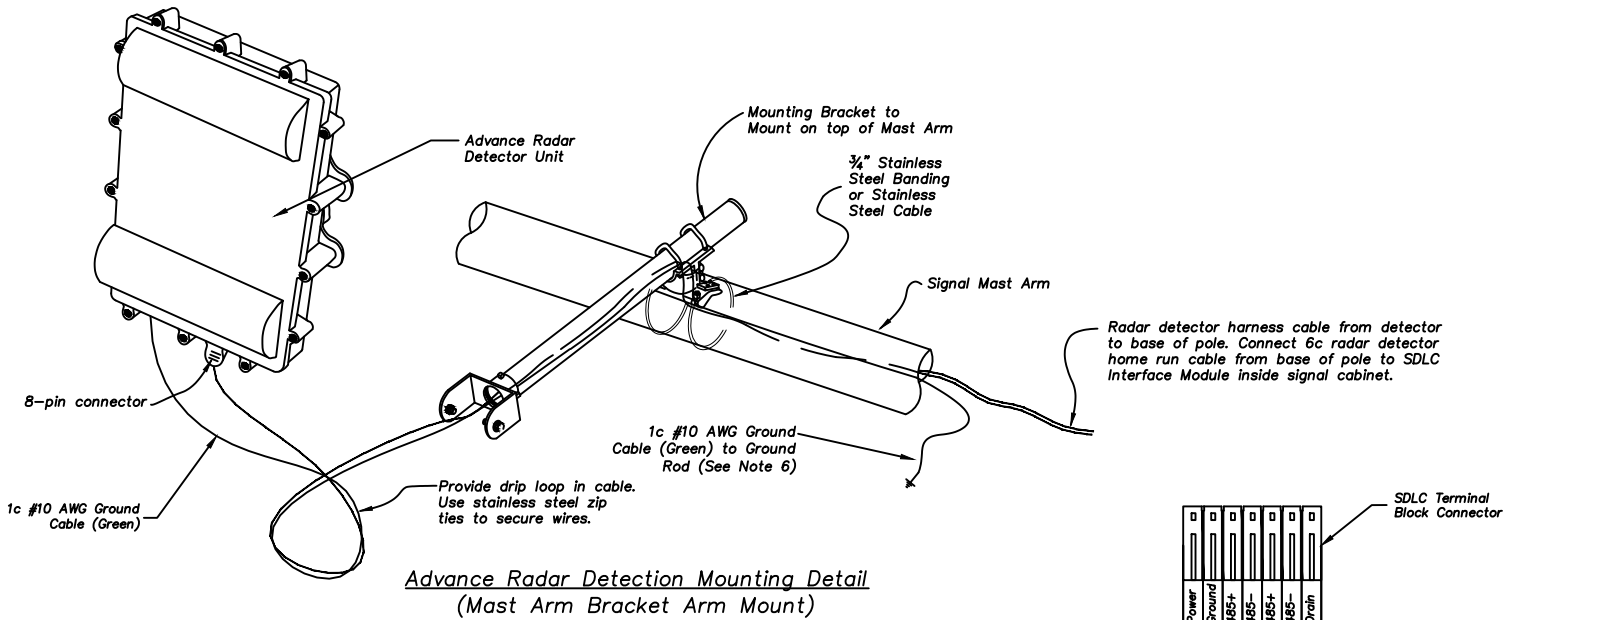


Advance Radar Detection Mounting Detail (Mast Arm Bracket Arm Mount)

- Notes:
1. Maintain offsets from center of the desired lane less than 24 feet.
 2. Apply silicon dielectric compound into the connector at the base of the radar detector
 3. Orient advance radar detector straight ahead with no downward tilt.
 4. Install presence radar detector below mast arm and orient as indicated for maximum detection.
 5. Mounting bracket arm shall be horizontal to road surface, and fastened to the bottom of mast arm. Maintain a minimum of 15' clearance from the sensor to the road surface.
 6. Install the 1c#10 AWG ground cable from the sensor to the ground rod in the closest service box adjacent to the pole the sensor is mounted on. Use a separate ground rod clamp for each sensor.

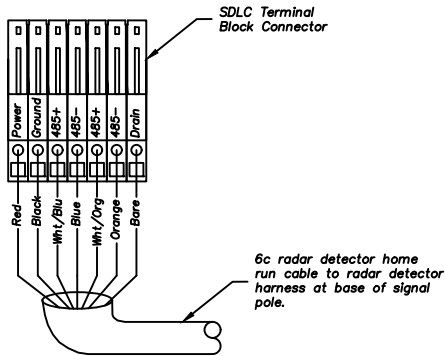


- Radar Detection Notes:
1. Plug cable connection into the SDLC cabinet interface module.
 2. One connection is required for every presence and advance sensor.

Radar Detection Rack Wiring Diagram Applies to both presence and advance radar

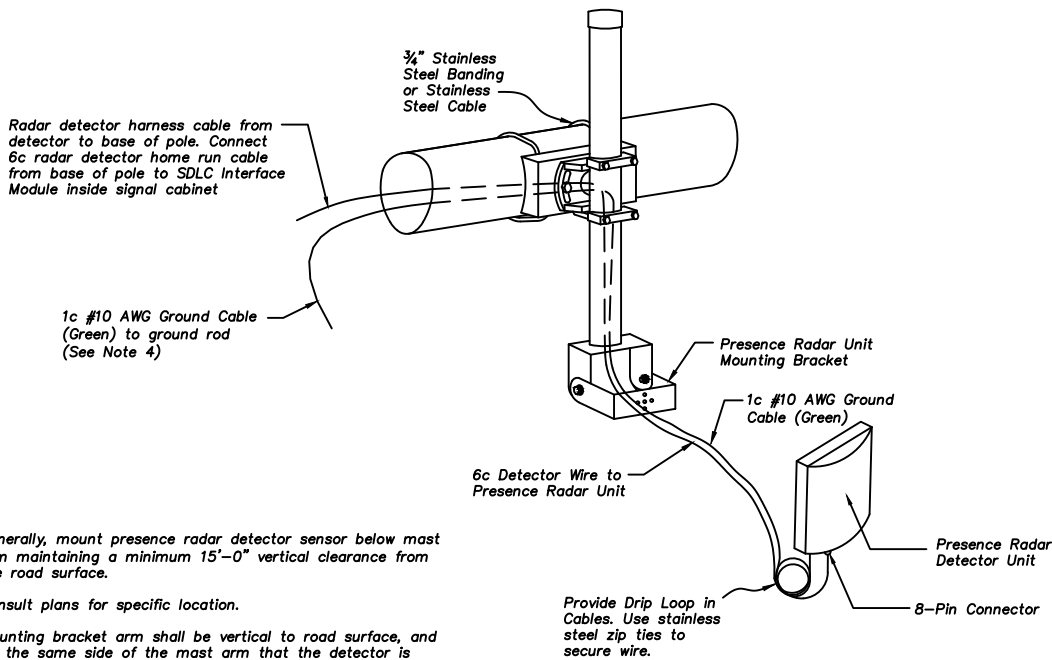


- Notes:
1. Generally, mount presence radar detector sensor below mast arm maintaining a minimum 15'-0" vertical clearance from the road surface.
 2. Consult plans for specific location.
 3. Mounting bracket arm shall be vertical to road surface, and on the same side of the mast arm that the detector is aimed, unless otherwise directed.
 4. Install the 1c#10 AWG ground cable from the sensor to the ground rod in the closest service box adjacent to the pole the sensor is mounted on. Use a separate ground rod clamp for each sensor.

Presence Radar Detection Mounting Detail (Mast Arm Bracket Arm Mount)





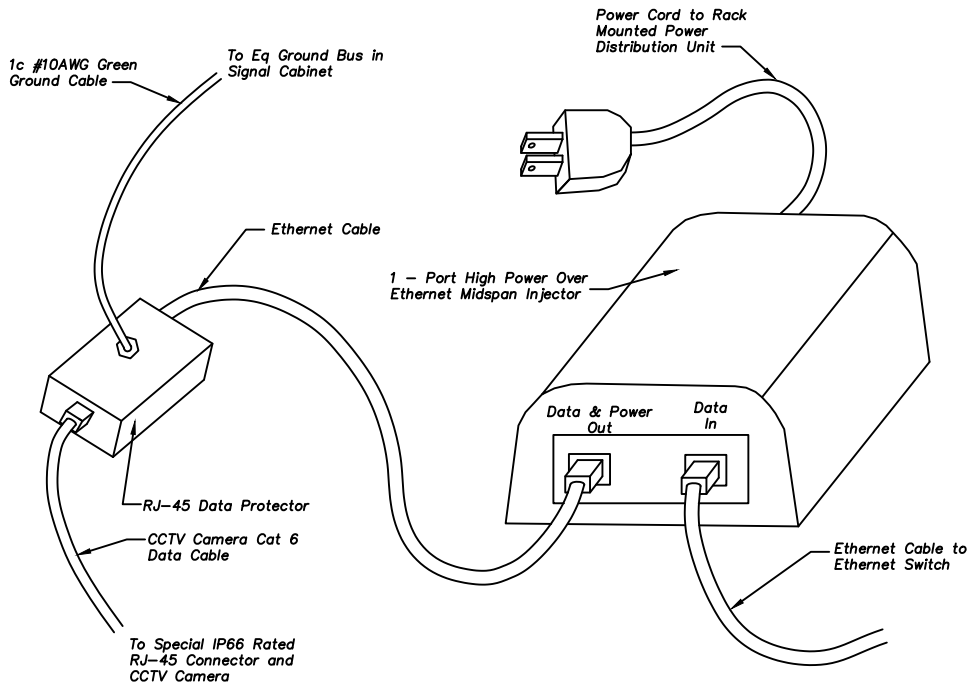


WARNING
Follow directions for RJ-45 Connector Installation


CCTV Camera Connection Detail

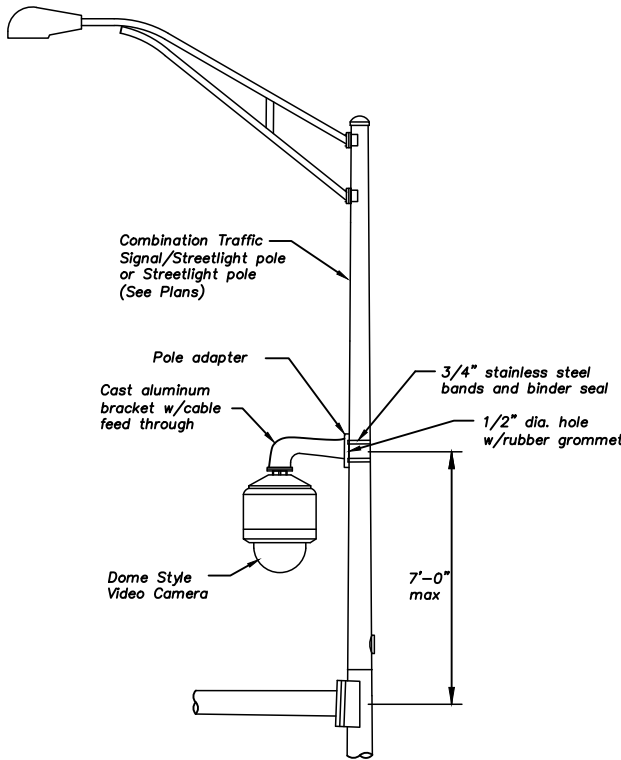

CCTV Camera Mounting Detail

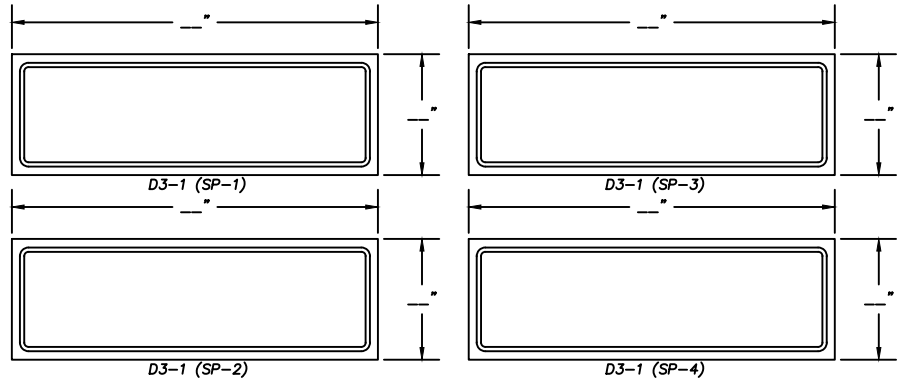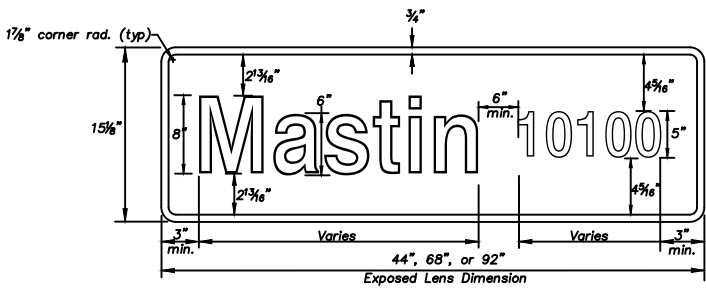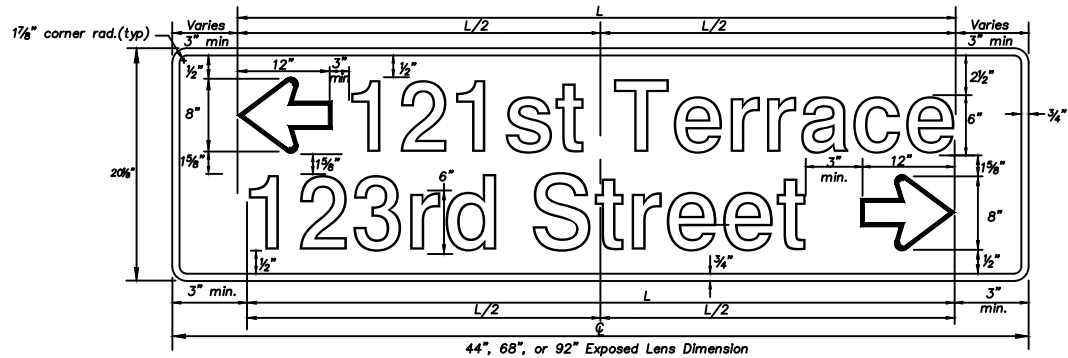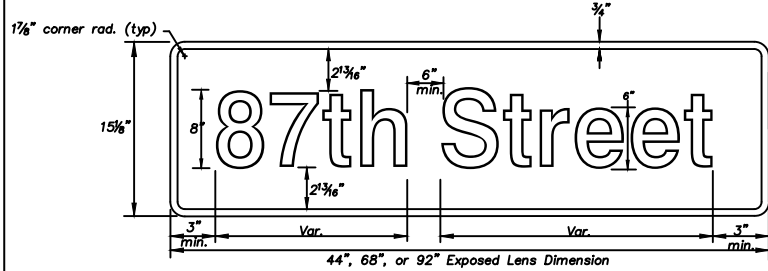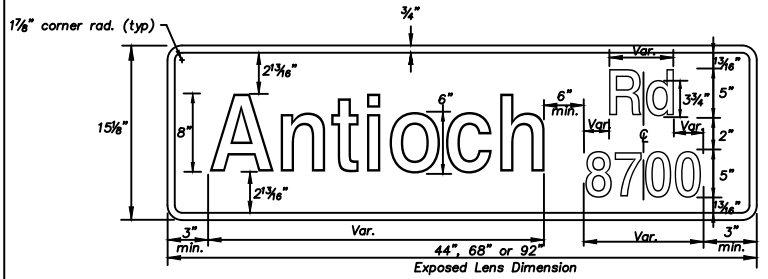

Project Sign Details
(Shown with Actual Sign Housing Dimensions)

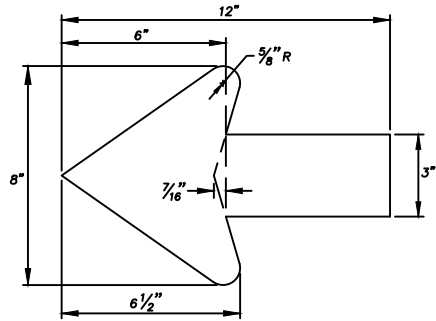

Arrow Dimensions (Inches)


Table 1 (Alpha Streets)	
Standard Abbreviation List	
Avenue	Ave
Boulevard	Blvd
Circle	Cir
Court	Ct
Creek	Crk
Drive	Dr
Highway	Hwy
Lane	Ln
Parkway	Pkwy
Place	Pl
Plaza	Plz
Road	Rd
Street	St
Terrace	Ter
Trail	Tr
Way	Way
Table 2 (Numbered Streets)	
Standard Abbreviation List	
First	st
Second	nd
Third	rd
Fourth to Ninth	th

Illuminated Street Name Sign Summary Chart					
Pole #	Sign Design	A	B	C	Cable Side
	SP-1				Left
	SP-2				
	SP-3				
	SP-4				Right


Sign Housing Dimensions
Dimension A is either 19" or 24"
Dimension B is either 48", 72", or 96"

Notes:




- Signs shall be one sided.
- Signs shall be rigid mounted top and bottom with brackets per the approved materials list.
- Signs shall be mounted with the sign centered vertically on and approximately level with the mast arm.
- Sheeting Requirements: Translucent micro-encapsulated retro-reflective sheeting (Type XI) with Electro Cutable Film.
Legend and Border: White
Background: Green
- Text Series: Emod 2000 sized as indicated in the examples.
- Power supply shall be self-sensing 120/240 volt.
- The contractor shall submit a detailed shop drawing indicating the legend and sign spacing for approval prior to fabrication.
- Red cables shall be connected to west and north oriented luminaires. Black cables shall be connected to east and south oriented luminaires.

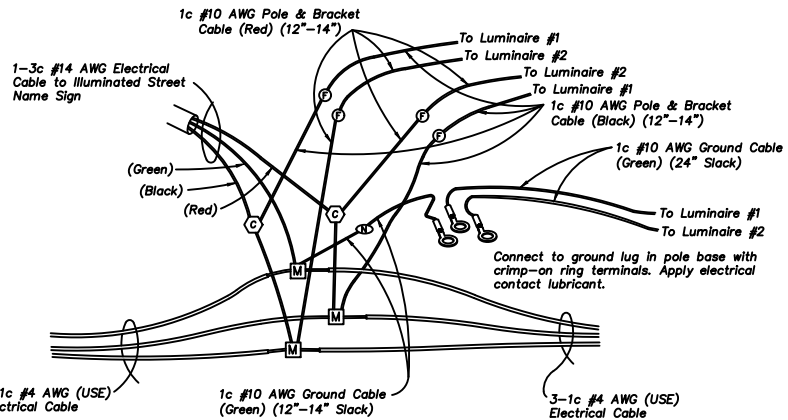

Illuminated Street Name Sign (240-Volt)
Electrical Connector Kit Schematic
(Twin Luminaires)

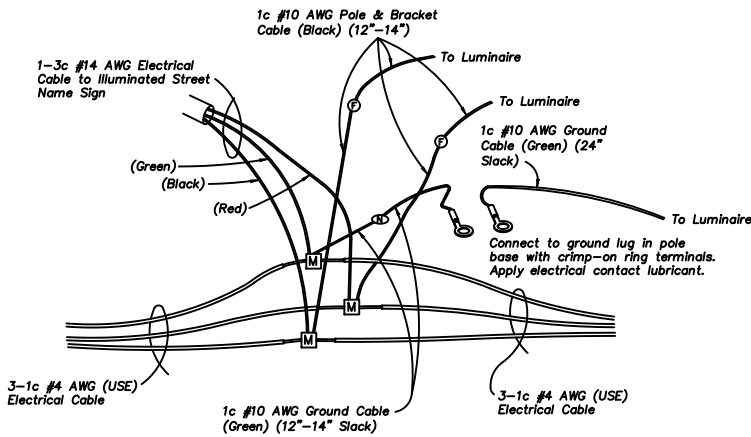

Illuminated Street Name Sign (240-Volt)
Electrical Connector Kit Schematic
(Single Luminaire)

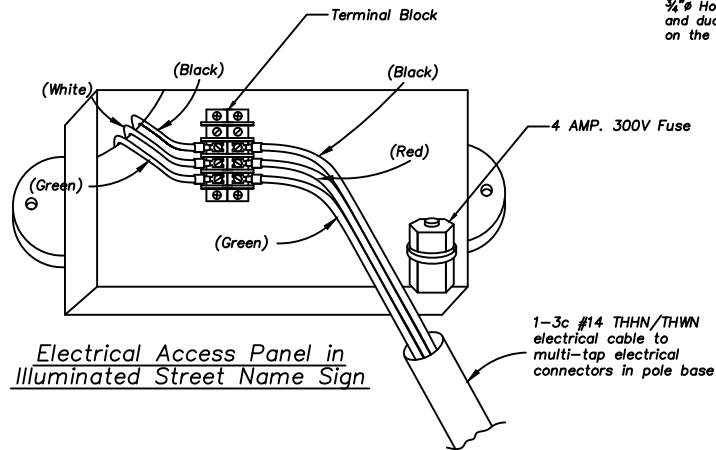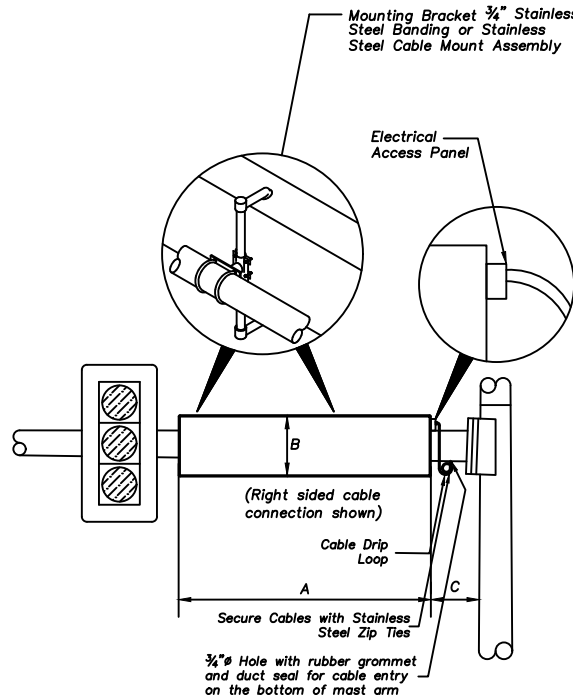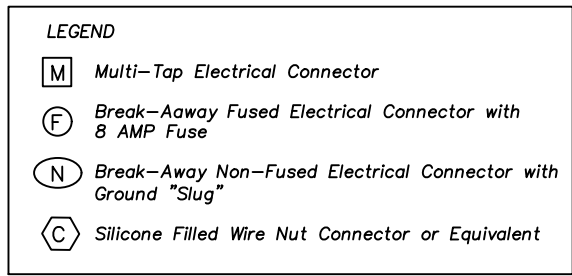

Electrical Access Panel in
Illuminated Street Name Sign