


* - Concrete to the top of pavement is allowable.

MONUMENT AND BOX WITH EXISTING PAVEMENT

Not to Scale

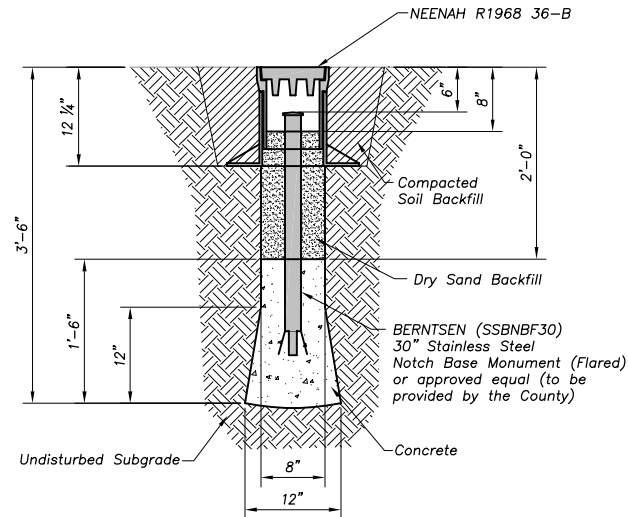

MONUMENT AND BOX WITH COMPACTED BACKFILL

Not to Scale

Monument Notes:

1. Overland Park Municipal Code (OPMC) and Overland Park Design and Construction Standards Manual (OPDCSM) are incorporated, except as otherwise noted.
2. All survey work related to preserving location and establishment of new monument shall be performed under supervision of the construction surveyor, who shall be a land surveyor licensed in the State of Kansas.
3. Construction surveyor is responsible for filing Notice of Endangerment Activity Report and Completion of Endangerment Activity Report with Kansas State Historical Society, Johnson County Engineer, and the City. Reports shall have at least 5 reference ties to points unlikely to be disturbed by construction, or 3 ties & State Plane Coordinates.
4. Stainless steel monument with brass cap will be furnished to the construction surveyor by Johnson County Public Works upon satisfactory review of Notice of Endangerment Activity Report.
5. Monument box and other material shall be furnished by Contractor.
6. Brass cap is not pre punched and after the monument is set in concrete the construction surveyor shall punch brass cap at exact location. No other information shall be punched on the cap by the construction surveyor.
7. Concrete used for pavement repair shall be KCMMB4K.

Government Corners to be preserved per this monument detail:

Corner	Section	Township	Range

Year 2021 Edition

REVISIONS:	
RELATED ORDINANCES:	DEPARTMENT OF PUBLIC WORKS STANDARD DETAILS
OPMC Title 13	LAND CORNER MONUMENT AND BOX DETAIL